Pro Cables™

6-CIRCUIT MULTICABLE **ASSEMBLIES**
18-CONDUCTOR / 19-PIN

Description
A comprehensive range of cables and 19-pin connectors to serve the needs of the stage lighting, audio, video, and power distribution industries.

Features
- Available in 16 and 14 AWG
- All black construction ideal for stage and set lighting applications
- Standard and custom configurations available
- Kellum grips available

Applications
Six circuits of 100 to 240 VAC power in a single cable. Suitable for dimmed or constant power lighting and video applications in Concerts; Touring; Theatre; Film and Television Production.

Available Cables
ProCable™ 18x1.5mm² Multicable
ProCable™ 18x2.5mm² Multicable

Available Connectors
ProSeries® 19-Pin-Solder
ProSeries® 19-Pin-Crimp [special order]
KC™ 19-Pin-Solder

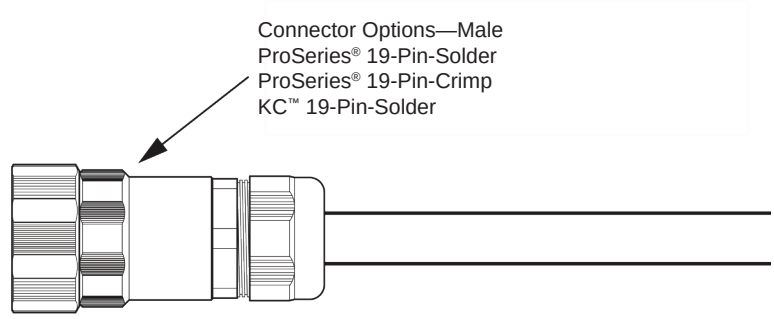

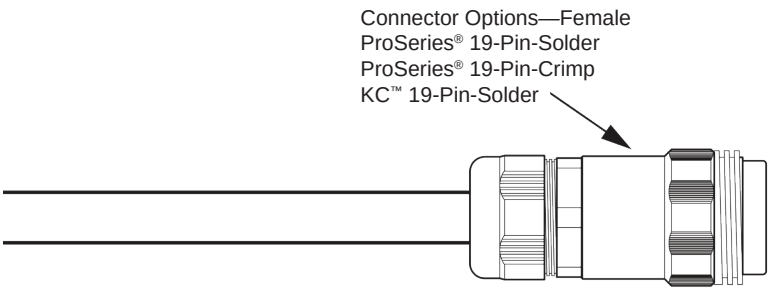

The First and Still the Best!
TMB Pro Cables – High-quality custom cable assemblies for the entertainment production and staging industry since 1983!
Over 60 highly skilled assembly technicians worldwide.
Well over 400 years combined experience!
Rigorous testing and quality control.
Famous TMB Rush Service Normal!

MADE IN THE USA

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb
tmbprocables.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +371 6389 8886
sales@tmb.com

© 2023, TMB. All rights reserved. Effective: 4 December 2023
Specifications are subject to change without notice. This information supersedes all previously supplied information.

ProCable™ 6-Circuit Multicables

PC18X1.5
Extra heavy-duty portable (indoor/outdoor)1.5.mm² copper-core conductor, 300/500V round cable, with PVC insulation, jacketed in black, chemical-resistant PVC compound. Conforms to IEC 228 CL5, IEC332-3, CE 20-22 11, and CE73/23EEC standards.
Full specifications at: https://tmb.com/docs/procable/pdf/ProCable-CE-LTR-web.pdf

PC18X2.5
Extra heavy-duty portable (indoor/outdoor) 2.5.mm² copper-core conductor, 300/500V round cable, with PVC insulation, jacketed in black, chemical-resistant PVC compound. Conforms to IEC 228 CL5, IEC332-3, CE 20-22 11, and CE73/23EEC standards.
Full specifications at: https://tmb.com/docs/procable/pdf/ProCable-CE-LTR-web.pdf

© 2023, TMB. All rights reserved. Effective: 4 December 2023
Specifications are subject to change without notice. This information supersedes all previously supplied information.

Pro Cables™

6-CIRCUIT MULTICABLE **ASSEMBLIES**
18-CONDUCTOR / 19-PIN

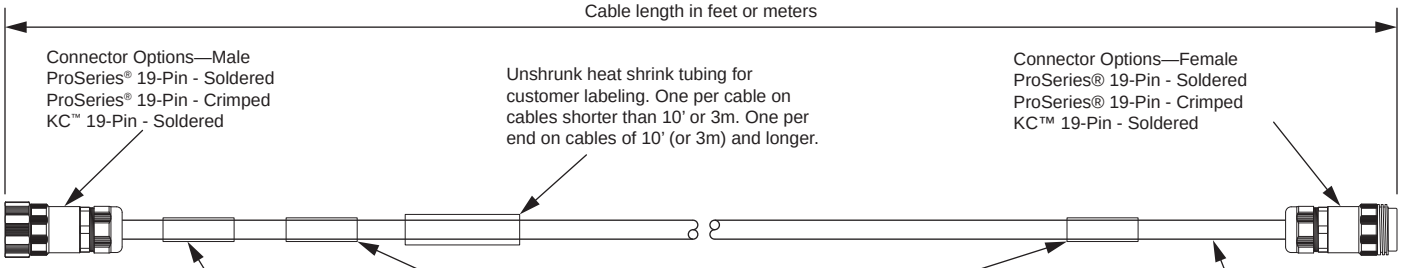

NOT TO SCALE

Example Code

Z	1815	PSP	10	LSE

Z	Designates cable assembly

10	Length of cable in feet
10M	Length of cable in meters

1815	ProCable™ 18x1.5mm² Multicable
1825	ProCable™ 18x2.5mm² Multicable

PSP	ProSeries® Connectors - Soldered
PSPC	ProSeries® Connectors - Crimped
KC	KC™ Connectors - Soldered

L	Custom labeling per specification
S	Support grip installed
E	Tethered protective connector caps installed

Any combination of L, S, and E adders can be added to the assembly as required.

ELECTRICAL SCHEMATIC

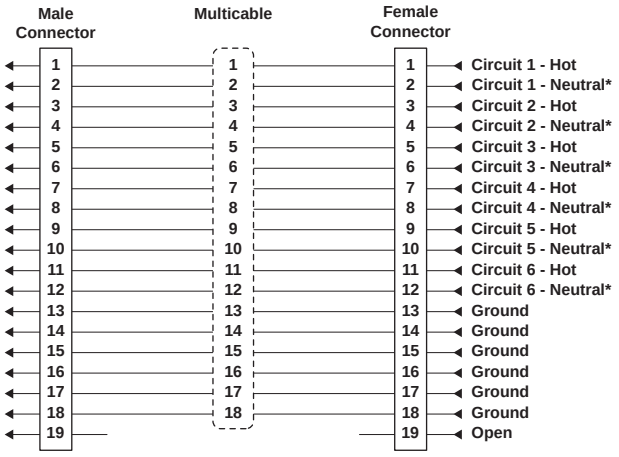

* Neutral or 2nd Hot in 208/240V Systems

ELECTRICAL RATING
(for maximum length 100 ft/30m)

18X1.5mm² Cable - 10A, 300 VAC Max**, 6-circuit

18X2.5mm² Cable - 15A, 300 VAC Max**, 6-circuit

** Maximum per NEC Table 520-44 (50% diversity of load and maximum rating of overcurrent device)

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb
tmbprocables.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +371 6389 8886

© 2023, TMB. All rights reserved. Effective: 4 December 2023
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com