Pro Cables™

POWERCON™ EXTENSION **ASSEMBLIES**
H07RN-F—EU

Description
Rugged, dependable, and highest quality PowerCon Extension Assemblies feature the attention to detail that puts Pro Cables cable assemblies in a class of their own. Available with heavy-duty Type H07RN-F cable, plus a wide selection of adapter cables, Pro Cables PowerCon Extension Assemblies are trusted by professionals everywhere.

Features
- Rugged construction for long life and durability
- Wide variety of Grey and Blue adapter cables
- Ideal for stage and theatrical uses
- Custom labels available for personalization and security. Standard and custom configurations available.

Applications
Portable power connection of many kinds: Concerts; Touring; Theatre; Film and Television Production.

Available Cables
3 x 1.5 mm² Type H07RN-F
3 x 2.5 mm² Type H07RN-F

Available Connectors
Neutrik PowerCon™ 20A Blue and Grey

Neutrik PowerCon™ 20A Grey Connector

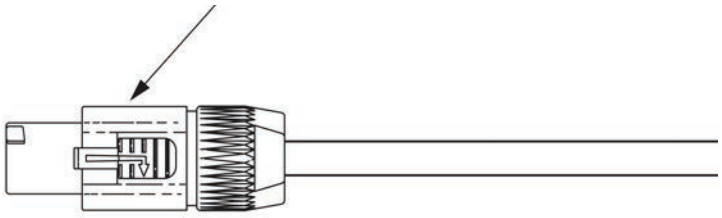

Neutrik PowerCon™ 20A Blue Connector

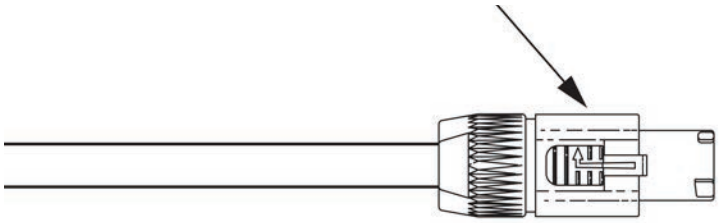

The First and Still the Best!
TMB Pro Cables – High-quality custom cable assemblies
for the entertainment production and staging industry since 1983!
Over 60 highly skilled assembly technicians worldwide.
Well over 400 years combined experience!
Rigorous testing and quality control.
Famous TMB Rush Service Normal!

MADE IN UK/EU

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb tmbprocables.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +37 16.868.8955

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com

Type H07RN-F Cable

H07RN-F cables are widely-used, general-purpose portable power cables, available under various brands from various manufacturers. The H07RN-F cables used in TMB Pro Cables' assemblies are typically Nexans' Titanex™ brand, although we may use other quality brands as circumstances dictate. H07RN-F cables supplied by TMB Pro Cables are all CE marked.

Stranded bare copper conductors with cross-linked elastomer insulation, 450/750V round cable, with black oil-, chemical-, and water-resistant cross-linked elastomer jacket. Flexible class 5. Operating temperature range: -25 to +55 °C. Cable conforms to International EN 50525-2-21; HD 22.4; HD 516; IEC 60245-4 type 66, and National NF C 32-102-4 standards.

Three conductor color code: Green/Yellow, Blue, Brown.

Part Number	Cross Section	No. of Conductor Cores	Outer Diameter min.	Outer Diameter max.	Approx. Weight	Current Max.
	mm^2		mm	mm	kg/km	Amps
WH073X1.5	1.5	3	9.2	11.9	134	26
WH073X2.5	2.5	3	10.9	14.0	195	36

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

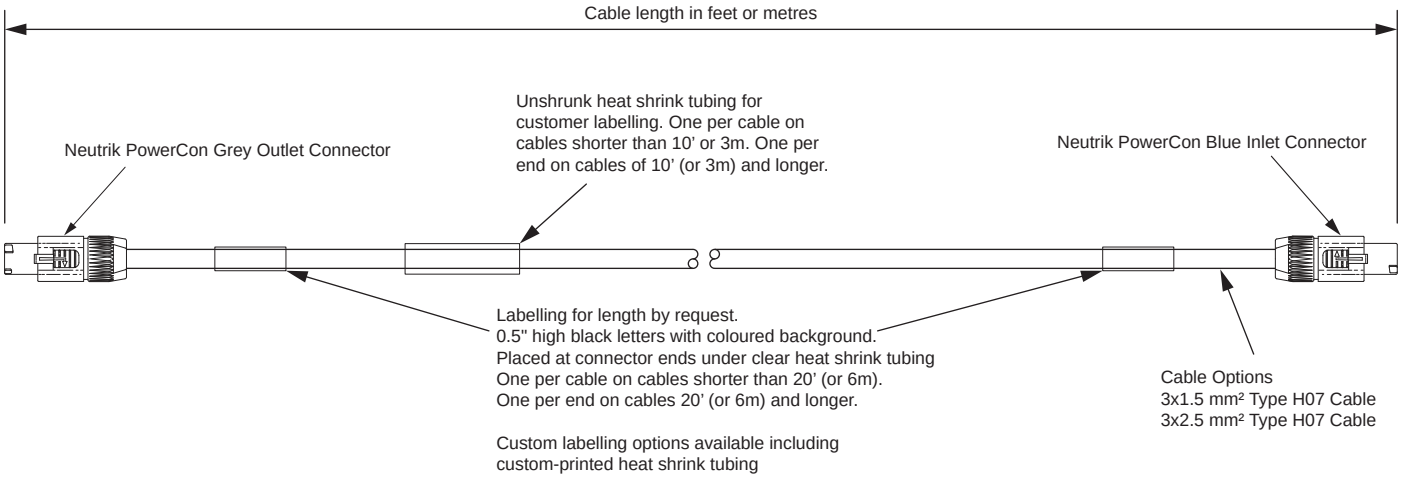

NOT TO SCALE

Example Code

Z	315	NAC3FC	AB	10M	L

Z	Designates cable assembly

315	3x1.5 mm² Type H07 Cable
325	3x2.5 mm² Type H07 Cable

10M	Length of cable in metres
10	Length of cable in feet

	Skip this section unless ordering custom labelling
L	Labelled for length or custom labelling

AB	A-B, inlet to outlet, blue to grey
AA	A-A, inlet to inlet, blue to blue
BB	B-B, outlet to outlet, grey to grey
ABE	Inlet to bare end
BBE	Outlet to bare end

NAC3FC	Neutrik PowerCon™ 20A Connectors

ELECTRICAL SCHEMATIC

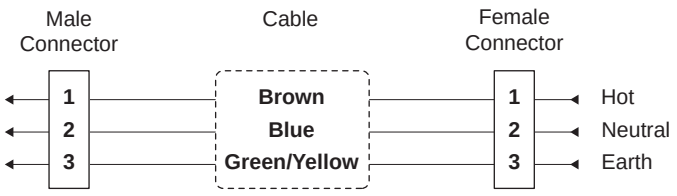

ELECTRICAL RATING

H07 1.5mm² Cable - 20A, 240 VAC Max, LN+E
H07 2.5mm² Cable - 20A, 240 VAC Max, LN+E

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmbprocables.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +37 16.868.8955

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com