POWERTRUE™ ADAPTERS
POWERCON TO TRUE1 TOP™

Description
Unique adapters designed to plug directly to inline Neutrik PowerCon™ connectors without an adapter barrel, saving time and labor. Efficiently integrate fixtures with True1 connectors with PowerCon cabling.

Features
- Rugged construction for long life and durability
- 0.3 m standard length, Custom lengths by special order.

Applications
Portable power connection of many kinds: Concerts; Touring; Theatre; Film and Television Production.

Available Cables
3 x 1.5 mm² Type H07RN-F

Available Configurations
Neutrik TRUE1 TOP™ male to Neutrik PowerCon™ Grey
Neutrik PowerCon™ Blue to Neutrik TRUE1 TOP™ female

The First and Still the Best!
TMB Pro Cables – High-quality custom cable assemblies
for the entertainment production and staging industry since 1983!
Over 60 highly skilled assembly technicians worldwide.
Well over 400 years combined experience!
Rigorous testing and quality control.
Famous TMB Rush Service Normal!

MADE IN UK/EU

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmbprocables.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +37 16.868.8955

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com

Type H07RN-F Cable

H07RN-F cables are widely-used, general-purpose portable power cables, available under various brands from various manufacturers. The H07RN-F cables used in TMB Pro Cables' assemblies are typically Nexans' Titanex™ brand, although we may use other quality brands as circumstances dictate. H07RN-F cables supplied by TMB Pro Cables are all CE marked.

Stranded bare copper conductors with cross-linked elastomer insulation, 450/750V round cable, with black oil-, chemical-, and water-resistant cross-linked elastomer jacket. Flexible class 5. Operating temperature range: -25 to +55 °C. Cable conforms to International EN 50525-2-21; HD 22.4; HD 516; IEC 60245-4 type 66, and National NF C 32-102-4 standards.

Three conductor color code: Green/Yellow, Blue, Brown.

Part Number	Cross Section	No. of Conductor Cores	Outer Diameter min.	Outer Diameter max.	Approx. Weight	Current Max.
	mm^2		mm	mm	kg/km	Amps
WH073X1.5	1.5	3	9.2	11.9	134	26

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

Pro Cables™

POWERTRUE™ ADAPTERS
POWERCON TO TRUE1 TOP™

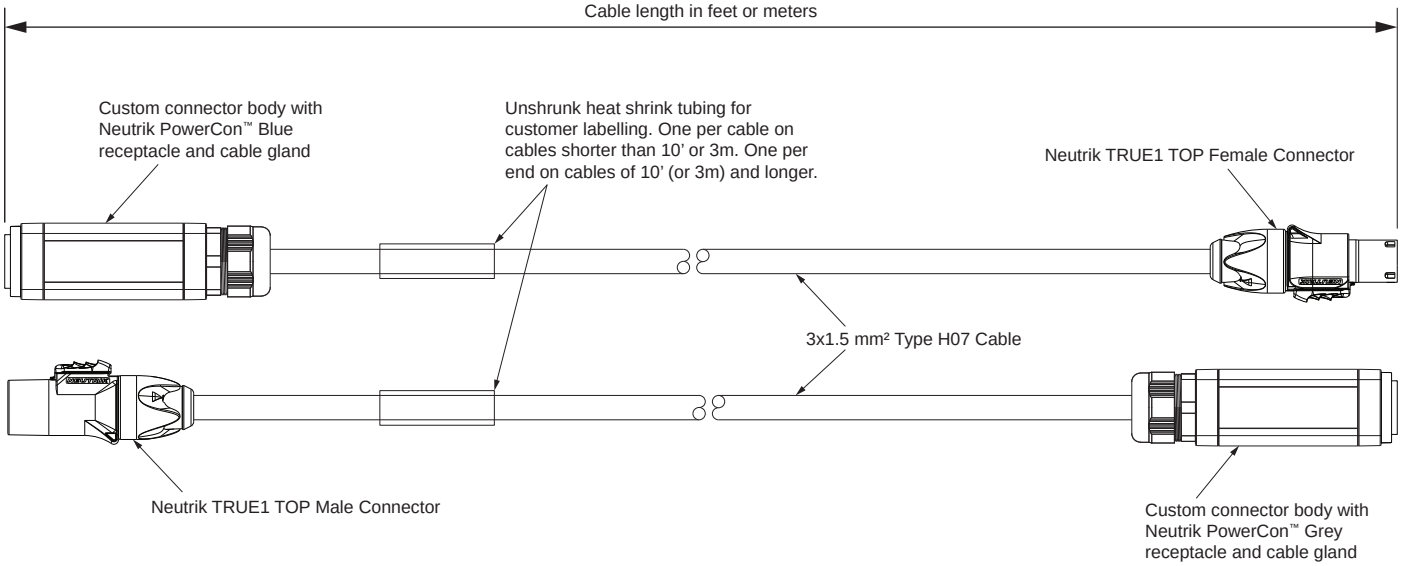

NOT TO SCALE

Example Code

Z	AD	NAT	NAC3B	1

Z	Designates cable assembly

AD	Adapter assembly

NAT	Neutrik TRUE1 TOP™ male connector
NAC3A	Neutrik PowerCon™ blue connector

NAC3B	Neutrik PowerCon™ grey connector
NAT	Neutrik TRUE1 TOP™ female connector

1M	Length of cable in metres
1	Length of cable in feet

ELECTRICAL SCHEMATIC

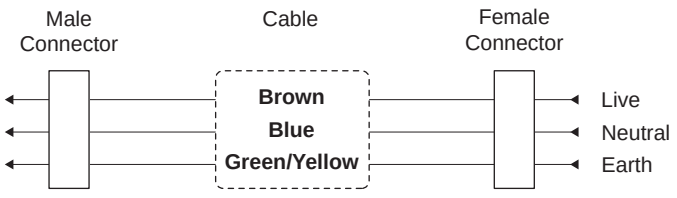

ELECTRICAL RATING

Type H07 1.5mm² Cable - 16A, 240 VAC Max, LN+E

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb tmbprocables.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +37 16.868.8955

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com