PCSP8

PCSP32

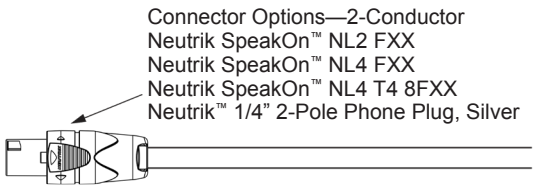

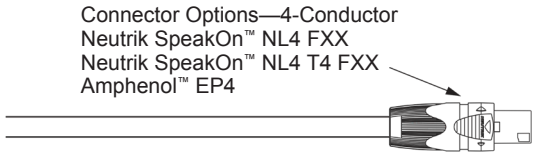





Description

Rugged ProCable multi-conductor stranded bare copper, PVC insulated, unshielded, PVC jacketed speaker cables featuring ProSeries™, Neutrik SpeakOn™, Neutrik™ 1/4", or Amphenol™ EP4 connectors.

Features

- Lightweight, flexible, hard-duty speaker cables that handle well in all conditions*
- Built for the Road! Flexible. Durable. Proven to withstand many years of heavy use
- Standard and custom configurations available
- Custom labeling also offered

Applications

Live Events, Nightclubs, Recording Studios, Corporate Events.

Available Cables

ProCable™ 12 AWG 2-Conductor Speaker
ProCable™ 13 AWG 4-Conductor Speaker
ProCable™ 13 AWG 8-Conductor Speaker
ProCable™ 16 AWG 32-Conductor Speaker

Available Connectors

2-Conductor

- Neutrik SpeakOn™ NL2 FXX
- Neutrik SpeakOn™ NL4 FXX
- Neutrik SpeakOn™ NL4 T4 FXX
- Neutrik™ 1/4" 2-Pole Phone Plug–Silver

4-Conductor

- Neutrik SpeakOn™ NL4 FXX
- Neutrik SpeakOn™ NL4 T4 FXX
- Amphenol™ EP4

8-Conductor

- ProSeries™ CA-COM8

32-Conductor

- ProSeries™ SC-32

The First and Still the Best!

TMB Pro Cables – High-quality custom cable assemblies
for the entertainment production and staging industry since 1983!
Over 60 highly skilled assembly technicians worldwide.
Well over 400 years combined experience!
Rigorous testing and quality control.
Famous TMB Rush Service Normal!

MADE IN THE USA

RoHS Compliant

Los Angeles +1 818.899.8818 | London +44 (0)20.8574.9700 | New York +1 201.896.8600 | Toronto +1 519.538.0888 | Beijing +86 10.8492.1587 | Riga +37 16.868.8955

tmbprocables.com

sales@tmb.com

© 2025, TMB. All rights reserved. Effective: 3 September 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

ProCable 12/2 Speaker Cable - PCSP2

Commercial-grade portable 12 AWG (4mm²), 2-conductor stranded copper, individually PVC insulated, overall round, matte-black PVC jacket, PVC jacket. RoHS compliant.

Full specifications at: https://tmb.com/docs/procable/pdf/ProCable-Speaker-LTR-web.pdf

ProCable 13/4 Speaker Cable - PCSP4

Commercial-grade portable 13 AWG (2.5mm²), 4-conductor stranded copper, individually PVC insulated, overall round, matte-black PVC jacket, PVC jacket. RoHS compliant.

Full specifications at: https://tmb.com/docs/procable/pdf/ProCable-Speaker-LTR-web.pdf

ProCable 13/8 Speaker Cable - PCSP8

Commercial-grade portable 13 AWG (2.5mm²), 8-conductor stranded copper, individually PVC insulated, ooverall round, matte-black PVC jacket, PVC jacket. RoHS compliant.

Full specifications at: https://tmb.com/docs/procable/pdf/ProCable-Speaker-LTR-web.pdf

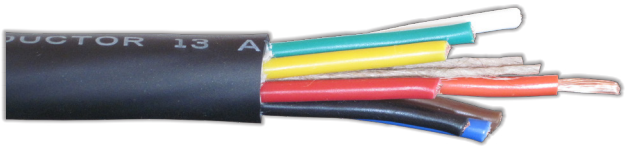

ProCable 16/32 Speaker Cable - PCSP32

Commercial-grade portable 16 AWG (2.5mm²), 32-conductor stranded copper, individually PVC insulated, ooverall round, matte-black PVC jacket, PVC jacket. RoHS compliant.

Full specifications at: https://tmb.com/docs/procable/pdf/ProCable-Speaker-LTR-web.pdf

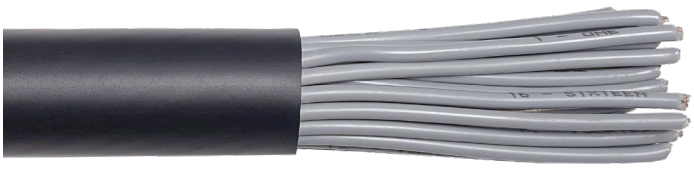

© 2025, TMB. All rights reserved. Effective: 3 September 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

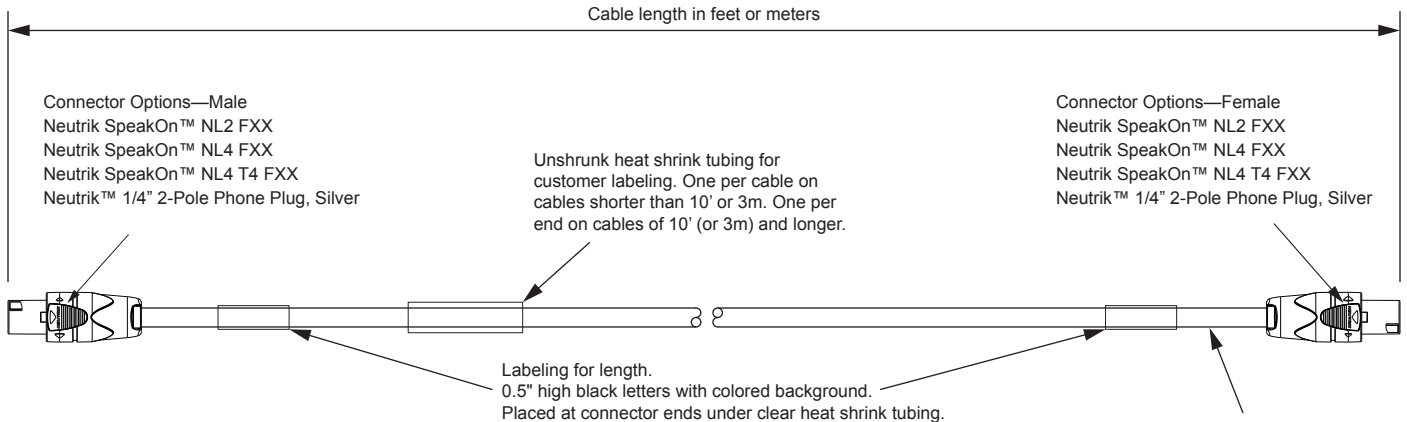

NOT TO SCALE

Example Code

Z	SP2	NL2	10	L

Z	Designates cable assembly

SP2	ProCable™ 12 AWG 2-Conductor Speaker Cable

	Skip this section unless ordering custom labeling
L	Custom labeling per spec

10	Length of cable in feet
10M	Length of cable in meters

NL2	Neutrik SpeakOn™ NL2 FXX Connectors
NL4	Neutrik SpeakOn™ NL4 FXX Connectors
NL4T4	Neutrik SpeakOn™ NL4 T4 FXX
NL4RD	Neutrik™ 1/4" 2-Pole Phone Plug, Silver

ELECTRICAL SCHEMATIC

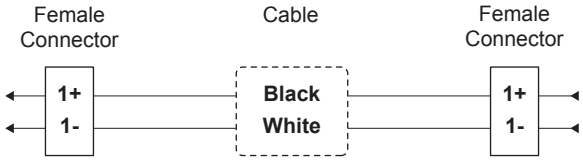

NL4 connectors pins 2+ and 2- not wired

© 2025, TMB. All rights reserved. Effective: 3 September 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

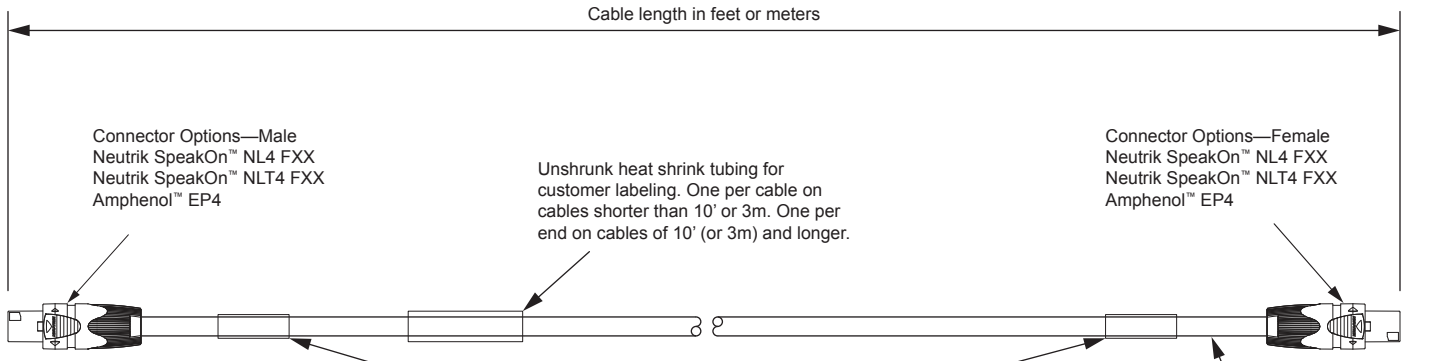

NOT TO SCALE

Example Code

Z	SP4	NL4	10	L

Z	Designates cable assembly

SP4	ProCable™ 13 AWG 4-Conductor Speaker Cable

	Skip this section unless ordering custom labeling
L	Custom labeling per spec

10	Length of cable in feet
10M	Length of cable in meters

NL4	Neutrik SpeakOn™ NL4 FXX Connectors
NLT4	Neutrik SpeakOn™ NLT4 FXX Connectors
EP4	Amphenol™ EP4 Connectors

ELECTRICAL SCHEMATIC

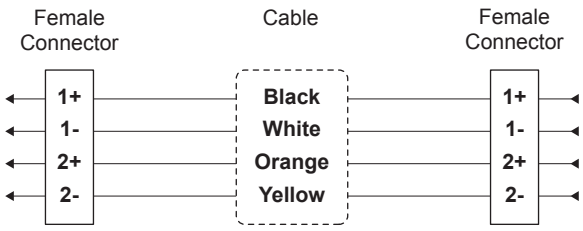

© 2025, TMB. All rights reserved. Effective: 3 September 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

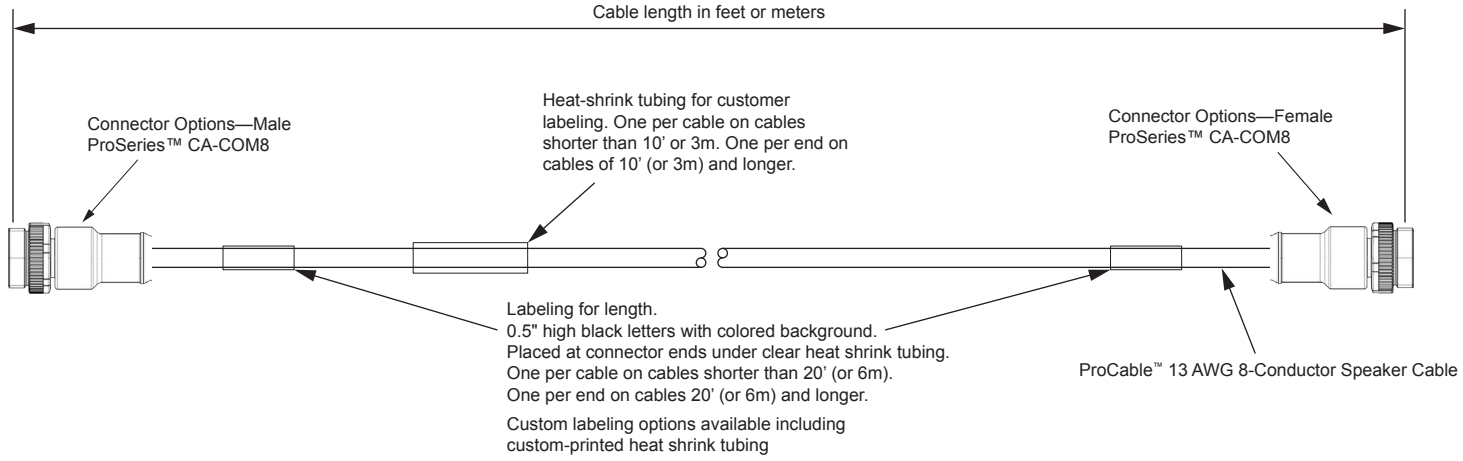

NOT TO SCALE

Example Code

Z	SP	SPKS08	10	L

Z	Designates cable assembly

SP	ProSeries CA-COM Connector

	Skip this section unless ordering custom labeling
L	Custom labeling per spec

10	Length of cable in feet
10M	Length of cable in meters

SPKS08	ProCable 13 Awg 8-Conductor Speaker Cable

ELECTRICAL SCHEMATIC

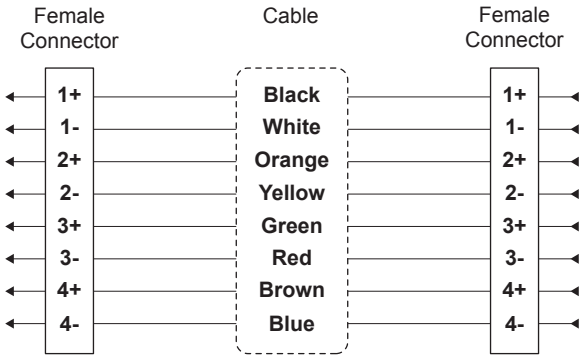

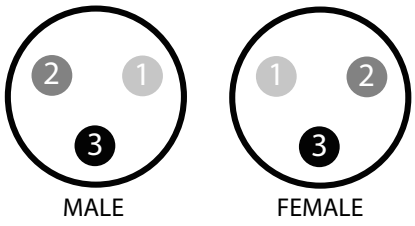

- Pin 1: Ground/Shield
- Pin 2: Positive/Hot
- Pin 3: Negative/Cold

© 2025, TMB. All rights reserved. Effective: 3 September 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

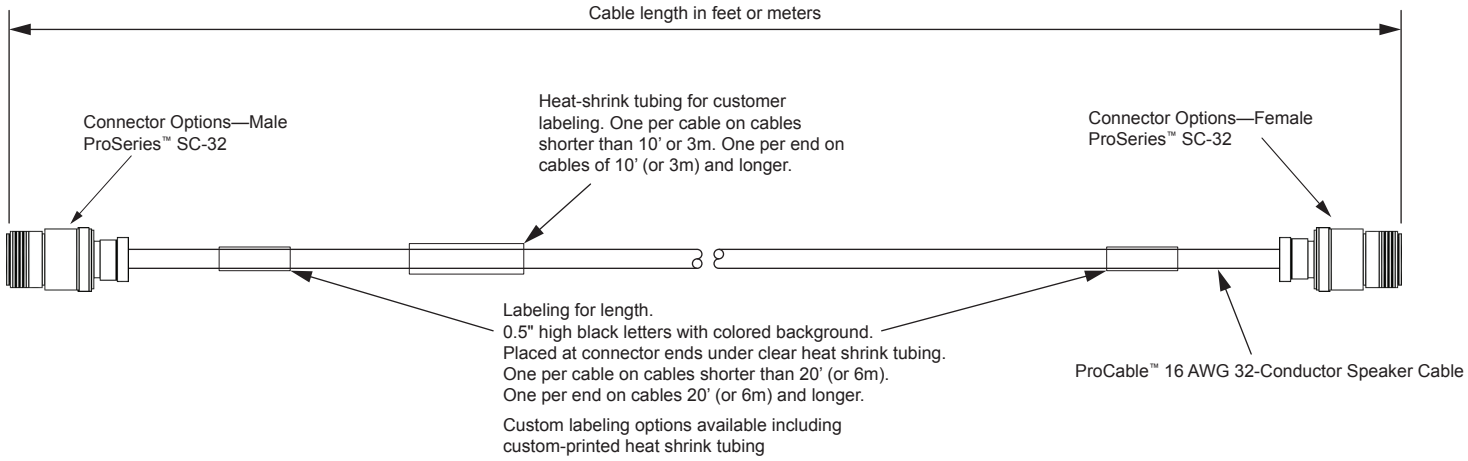

NOT TO SCALE

Example Code

Z	1632	SPKS37	10	L

Z	Designates cable assembly

1632	ProCable™ 16 AWG 32-Conductor Speaker Cable

SPKS37	ProSeries SC-32 Connector

10	Length of cable in feet
10M	Length of cable in meters

	Skip this section unless ordering custom labeling
L	Custom labeling per spec

ELECTRICAL SCHEMATIC

Con	Pin	Out	Con	Pin	Out
1	N	7+	17	R	8+
2	W	10-	18	Z	11-
3	V	10+	19	f	14-
4	U	9-	20	k	16-
5	M	6-	21	j	16+
6	c	13+	22	h	15-
7	b	12-	23	g	15+
8	T	9+	24	a	12+
9	L	6+	25	S	8-
10	F	3-	26	K	5-
11	G	4+	27	E	3+
12	e	14+	28	A	1+
13	P	7-	29	B	1-
14	X	11+	30	C	2+
15	d	13-	31	D	2-
16	J	5+	32	H	4-



Male SC32 connector
(Example: L Series rear panel)

● Used pins
● Unused pins

© 2025, TMB. All rights reserved. Effective: 3 September 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

Part Numbers	
PROCABLE SPEAKER CABLE (RAW)	
PCSP2	PROCABLE PROFESSIONAL SPEAKER CABLE 2c/#12AWG
PCSP4	PROCABLE PROFESSIONAL SPEAKER CABLE 4c/#13AWG
PCSP8	PROCABLE PROFESSIONAL SPEAKER CABLE 8c/#13AWG
PCSP32	PROCABLE PROFESSIONAL SPEAKER CABLE 32c/#16AWG
PROSERIES SPEAKER CONNECTORS	
PSSPK37LF-R	PROSERIES SPEAKER CONNECTOR 37PIN LF WITH LOCKING RING SC-32
PSSPK37LM-R	PROSERIES SPEAKER CONNECTOR 37PIN LM WITH LOCKING RING SC-32
PSSPK37LM-NR	PROSERIES SPEAKER CONNECTOR 37PIN LM NO LOCKING RING SC-32
PSSPK08LF-R	PROSERIES SPEAKER CONNECTOR 8PIN LF WITH LOCKING RING CA-COM
PSSPK08LM-R	PROSERIES SPEAKER CONNECTOR 8PIN LM WITH LOCKING RING CA-COM
PROCABLE SPEAKER 4 X 13 AWG NL-4	
ZSP4NL450	PROCABLE SPEAKER CABLE 4 X 13 AWG NL-4: 50’
PROCABLE SPEAKER 8 X 13 AWG NL-8	
ZSP8NL850	PROCABLE SPEAKER CABLE 8 X 13 AWG NL-8: 50’
PROCABLE SPEAKER 8 X 13 AWG CA-COM	
ZSPSPKS08xx	PROCABLE SPEAKER CABLE 8 X 13 AWG CA-COM: 50’
PROCABLE SPEAKER 32 X 16 AWG SC-32	
Z1632SPKS37xx	PROCABLE SPEAKER CABLE 32X16 AWG SC-32 : 50’

© 2025, TMB. All rights reserved. Effective: 3 September 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

CONTACT INFORMATION

LOS ANGELES HEADQUARTERS

527 Park Avenue | San Fernando, CA 91340, USA

Tel: +1 818.899.8818 | Fax: +1 818.899.8813

sales@tmb.com

TMB 24/7 TECH SUPPORT

US/Canada: +1.818.794.1286

Toll Free: 1.877.862.3833 (1.877.TMB.DUDE)

UK: +44 (0)20.8574.9739

Toll Free: 0800.652.5418

techsupport@tmb.com

LOS ANGELES +1 818.899.8818

LONDON +44 (0)20.8574.9700

NEW YORK +1 201.896.8600

BEIJING +86 10.8492.1587

CANADA +1 519.538.0888

RIGA +371 6389 8886

www.tmbprocables.com

A full service company providing technical support, customer service, and follow-up. Providing products and services for the industrial, entertainment, architectural, installation, defense, broadcast, research, telecommunications, and signage industries. Servicing the global market from offices in Los Angeles, London, New York, Toronto, Riga and Beijing.