Description

Unique adapters designed to facilitate daisy-chaining of power for multiple fixtures. Heavy-duty thermoplastic polyester elastomer power box is virtually indestructable. Fixture pigtail made with heavy-duty H07-RNF cable.

Features

- Rugged construction for long life and durability
- 1 m standard length. Custom lengths by special order.
- Optional clamp bracket for securely rigging boxes

Applications

Portable power connection of many kinds: Concerts; Touring; Theatre; Film and Television Production.

Available Cables

3 x 1.5 mm² Type H07RN-F

Available Configurations

True1™ In and Thru connectors and PowerCon™ Blue tail
True1™ In and Thru connectors and True1™ female tail
True1™ In and Thru connectors and Mennekes™ 16A CEEform female tail
True1™ In and Thru connectors and heavy-duty Schuko female tail
Other connectors by special order

Optional clamp bracket for securely rigging True1 Taps

The First and Still the Best!

TMB Pro Cables – High-quality custom cable assemblies
for the entertainment production and staging industry since 1983!
Over 60 highly skilled assembly technicians worldwide.
Well over 400 years combined experience!
Rigorous testing and quality control.
Famous TMB Rush Service Normal!

MADE IN UK/EU

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

Type H07RN-F Cable

H07RN-F cables are widely-used, general-purpose portable power cables, available under various brands from various manufacturers. The H07RN-F cables used in TMB Pro Cables' assemblies are typically Nexans' Titanex™ brand, although we may use other quality brands as circumstances dictate. H07RN-F cables supplied by TMB Pro Cables are all CE marked.

Stranded bare copper conductors with cross-linked elastomer insulation, 450/750V round cable, with black oil-, chemical-, and water-resistant cross-linked elastomer jacket. Flexible class 5. Operating temperature range: -25 to +55 °C. Cable conforms to International EN 50525-2-21; HD 22.4; HD 516; IEC 60245-4 type 66, and National NF C 32-102-4 standards.

Three conductor color code: Green/Yellow, Blue, Brown.

Part Number	Cross Section	No. of Conductor Cores	Outer Diameter min.	Outer Diameter max.	Approx. Weight	Current Max.
	mm^2		mm	mm	kg/km	Amps
WH073X1.5	1.5	3	9.2	11.9	134	26

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

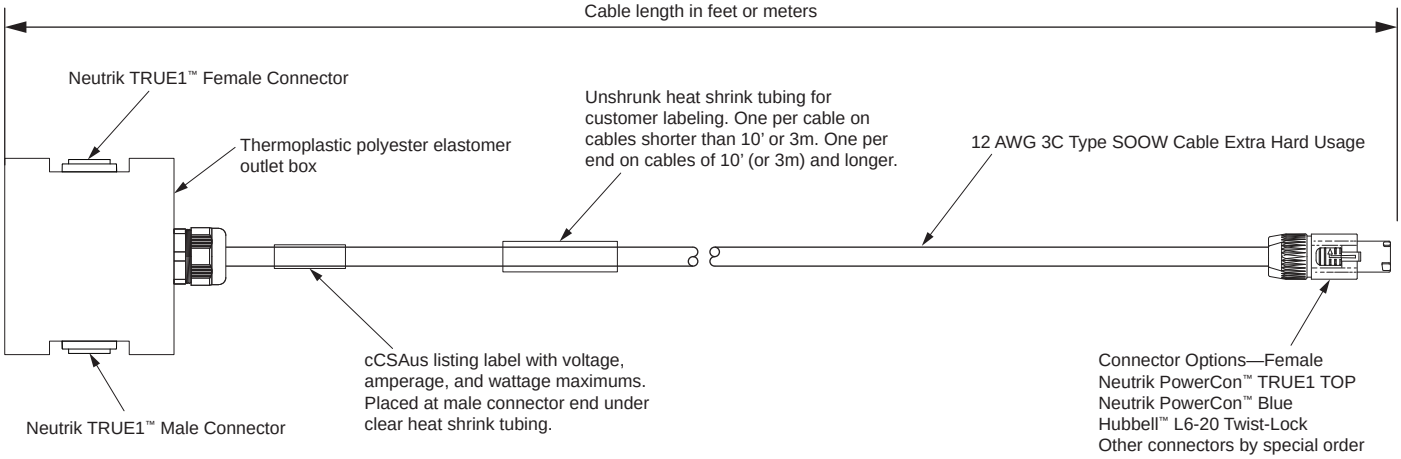

NOT TO SCALE

Example Code

Z	T1TAP	NAC	3	CB

Z	Designates cable assembly

T1TAP	Tap box with Neutrik TRUE1 male and female connectors

NAT	Neutrik PowerCon TRUE1 TOP™ Female Connector
NAC	Neutrik PowerCon™ 20A Blue Connector
L620	Hubbell™ L6-20 Twist-Lock Female Connector
BE	Bare end, no connector

3	Length of tail in feet
3M	Length of tail in meters

	Skip if not ordering clamp bracket
CB	Includes clamp bracket

ELECTRICAL SCHEMATIC

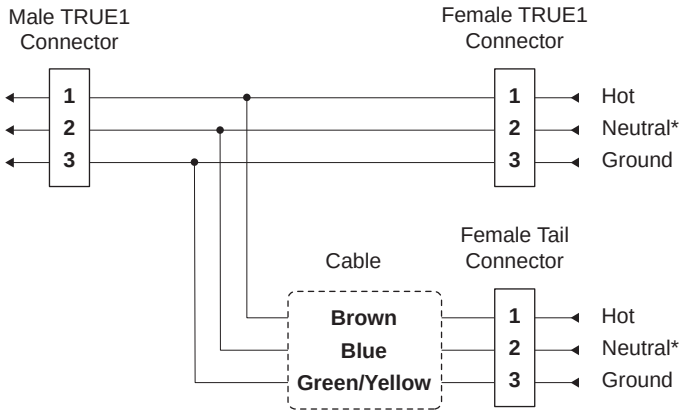

* Neutral or 2nd Hot in 208/240V Systems

ELECTRICAL RATING

Type H07 1.5mm² Cable - 16A, 240 VAC Max, LN+E

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb tmbprocables.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +37 16.868.8955

© 2022, TMB. All rights reserved. Effective: 14 February 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com