


The Leader in Touring Technology, Now Coming to a Building Near You!



- Drives up to 128 IMS lamps, 64 lamps each output (may vary depending on cable length)
- Configurable for long or short cable lengths and spacings
- Signal transcoding option allows longer cable runs, or lower bit-rate dimming for artistic flexibility
- Pluggable Terminal Block (PTB) screw terminals for bare-wire, installation flexibility
- Complete range of DIN Rail Devices and Drives to make a complete system!

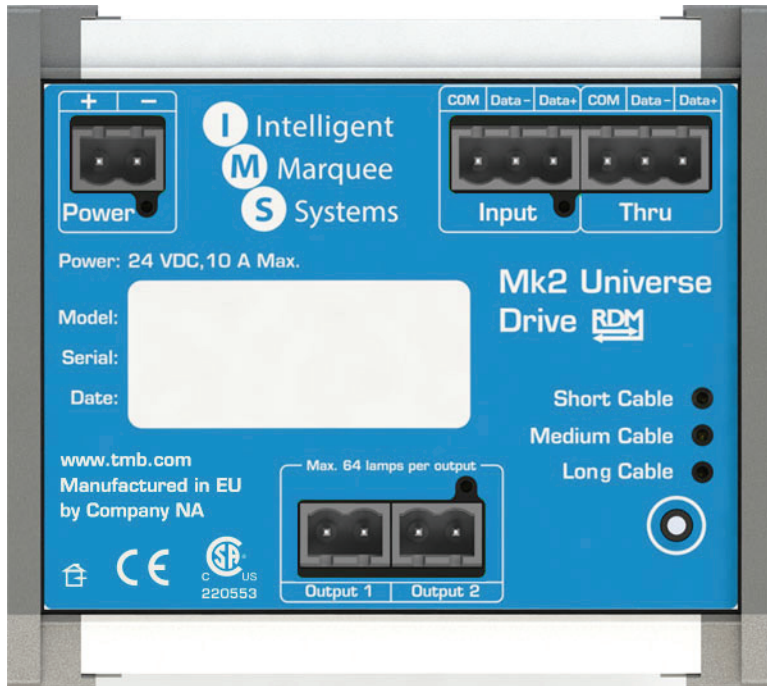

Indoor / Outdoor 12" and 24" complete, pre-wired NEMA enclosure kits available



Worldwide Exclusive Distribution

sales@tmb.com

Los Angeles
 +1 818.899.8818

London
 +44 (0)20.8574.9700



New York
 +1 201.896.8600


Beijing
 +86 10.8492.1587

Toronto
 +1 519.538.0888


IMS DIN Rail Universe Drive Specifications	
Operating Voltage	24 VDC
Frequency Tolerance	50-60 Hz
Power Consumption	External 250 W PSU required
Number of Outputs	2
Output Voltage	24 VDC
Number of Universes	1
Power Input	Pluggable Terminal Block (PTB) 2-terminal ¹
DMX512 Input	Pluggable Terminal Block (PTB) 3-terminal ¹
DMX512 Thru	Pluggable Terminal Block (PTB) 3-terminal ¹
Power/Data Outputs	2x Pluggable Terminal Block (PTB) 2-terminal ¹
Max. Cable Length	246 ft. (75m) to last lamp, max. 64 lamps, using 14 AWG / 2.5 mm ² 2-conductor festoon cable ²
Dimensions (HxWxD)	1.55 x 4.1 x 3.63" [39.5 x 104 x 92.3 mm]
Weight	6.13 oz [174 g]

¹ Included

² See page 3 for Cable Length / Lamp Spacing Tables

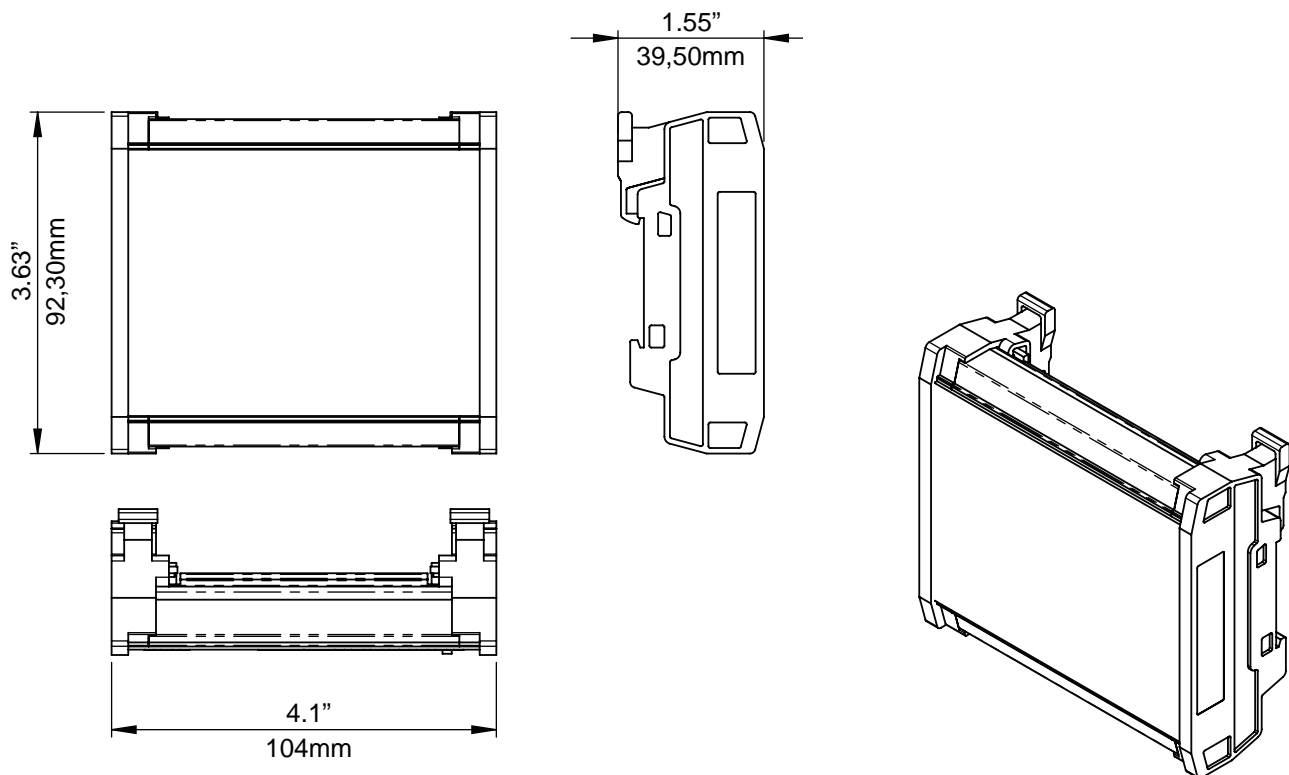

Cable Length / Lamp Spacing Tables*

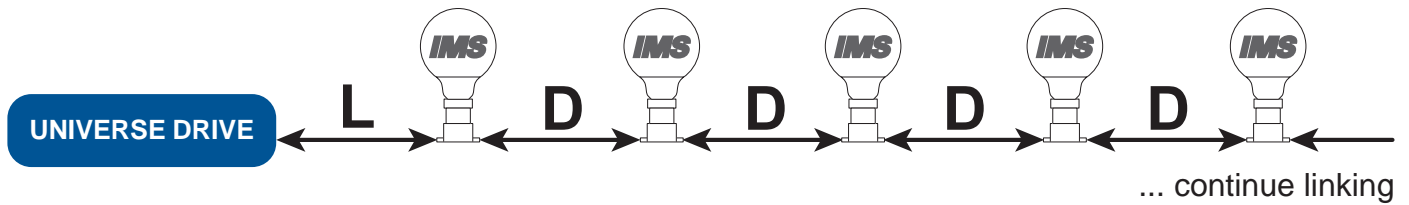

if D = 15 cm		
Cable setting	L	Max.
Short	1 m	64
Medium	5 m	64
Long	20 m	64
Short with transcoding	5 m	64
Medium with transcoding	25 m	64
Long with transcoding	55 m	64

if D = 30 cm		
Cable setting	L	Max.
Short	1 m	51
Medium	5 m	64
Long	10 m	64
Short with transcoding	5 m	64
Medium with transcoding	20 m	64
Long with transcoding	50 m	64

if D = 50 cm		
Cable setting	L	Max.
Short	1 m	41
Medium	1 m	64
Long	10 m	64
Short with transcoding	1 m	62
Medium with transcoding	15 m	64
Long with transcoding	45 m	64

if D = 100 cm		
Cable setting	L	Max.
Short	1 m	30
Medium	1 m	46
Long	1 m	64
Short with transcoding	1 m	45
Medium with transcoding	1 m	64
Long with transcoding	40 m	64

LEGEND	
	IMS Lamp
Max. 	Max. amount of working lamps
L	Length of cable between Universe Drive and first lamp
D	Distance between lamps (cm)

* The above settings are recommended using IMS122CL3 cable. Settings may vary depending on cable type, IMS control data transfer rate, and other conditions. The settings are examples of different scenarios and their tested results.