


Multi-conductor stranded bare copper, PVC insulated, unshielded, PVC jacketed speaker cable



PCSP2



PCSP4

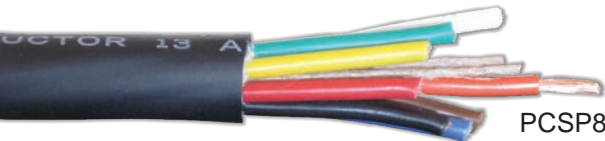

PCSP8



PCSP18

Specifications				
Part Number	PCSP2	PCSP4	PCSP8	PCSP18
Conductors	Number of Conductors	2	4	8
	Size and Stranding	12 AWG [4 mm ²] 65 strands 30 AWG	13 AWG [2.5 mm ²] 52 strands 30 AWG	12 AWG [4 mm ²] 65 strands 30 AWG
	Material	Bare annealed copper		
Insulation	Material	Polyvinyl Chloride		
	Wall Thickness	0.020" [.51 mm] nom.		
	Diameter	0.141" [3.58 mm] nom.	0.127" [3.23 mm] nom.	0.131" [3.33 mm] nom.
	Color Code	1-White 2-Black 3-Orange 4-Yellow 5-Green 6-Red 7-Brown 8-Blue		All conductors gray with numbers printed in black ink
Assembly	Lay Length	3" [76.2 mm]	5" [127 mm]	7" [177.8 mm]
	Fillers	Jute as required		PVC filler in core
	Separator	0.001" [0.0254 mm] Paper tape		Mica
Jacket	Material	Polyvinyl Chloride		
	Wall Thickness	0.040" [1 mm]	0.055" [1.4 mm]	0.060" [1.52 mm]
	Overall Diameter	0.365" +/- 0.010" [9.27 mm +/- 0.25 mm]	0.420" +/- 0.010" [10.67 mm +/- 0.25 mm]	0.545" +/- 0.010" [13.84 mm +/- 0.25 mm]
	Colour	Matte Black		
Markings	Type	Surface printing in white ink		
	Legend	TMB PROCABLE PROFESSIONAL SPEAKER CABLE 2 CONDUCTOR 12 AWG / 4 MM ²	TMB PROCABLE PROFESSIONAL SPEAKER CABLE X CONDUCTOR 13 AWG / 2.5 MM ² (X) denotes the number of conductors	TMB PROCABLE PROFESSIONAL SPEAKER CABLE 18 CONDUCTOR 12 AWG / 4 MM ²
Ratings	Voltage Rating	300 Volts max.		
	Temperature Rating	75°C dry max.		
Weight (not including reel or packaging)	96 lbs./mft [142.8 Kg/Km]	130 lbs./mft [193.5 Kg/Km]	237 lbs./mft [352.6 Kg/Km]	624 lbs./mft [928.2 Kg/Km]

Worldwide Exclusive Distribution

RoHS
Compliant

sales@tmb.com

Los Angeles
+1 818.899.8818

London
+44 (0)20.8574.9700

tmb
www.tmb.com

New York
+1 201.896.8600

Beijing
+86 10.8492.1587

Toronto
+1 519.538.0888