The World's Most Durable Ethernet Cables

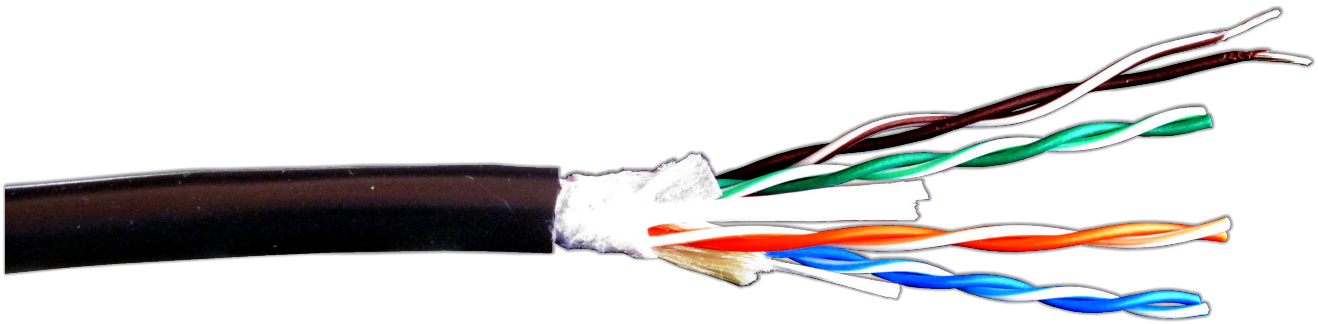

Ethernet patch cables designed to withstand the extreme conditions of the real world. Available as fully assembled patch cables, in standard and custom lengths, with your choice of three heavy-duty RJ-45 connector formats. Panel-mount connectors also available for a complete OEM Ethernet wiring solution.

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb www.tmb.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +371 6389 8886
sales@tmb.com

© 2026, TMB. All rights reserved. LITPCCAT5EUTPPA4 Effective: 2 September 2026
Specifications are subject to change without notice. This information supersedes all previously supplied information.

ProPlex®

CAT5e ULTRA-PATCH U/UTP **ETHERNET CABLE** PCCAT5EUTPP

General Information

A 4 pair, 24 AWG, 100 Ohm U/UTP round cable, designed to the IEC 61156-6 and TIA/EIA 568-B.2 CAT5 requirements. The cable contains 4 twisted pairs, cabled, assembled with kevlar reinforcement strands, jacketed in Black UV resistant Polyurethane.

General Specifications

Part Number	PCCAT5EUTPP
Conductors	24 AWG [0.25 mm²] tinned copper, 7x0.20 mm
Insulation	Solid PO, Nom. Nom. Dia. 0.038" [0.97 mm]
Colour Code	Colour coded 568-B
Assembly	Pairs cabled with Kevlar strength members and separation tape wrapped.
Shields	None
Jacket	Black, special PUR compound.
Marking	ProPlex PCAT5EUTPP 24AWG UTP 100MHZ data cable CAT5E verified
Weight	30 lbs./mft [44 Kg/Km]
Outside Diameter	0.244" [6.2 mm] nom. +/-0.012" [0.3 mm]
Minimum Bend Radius	45 mm
Tensile Strength	270 kg
Operational Pulling Tension	20 kg max. (@0.3% Elongation)
Temperature Rating	Installation: -5° to +60° C Operational: -25° to +70°C
Compliance	RoHS

Electrical Specifications

Voltage Rating	230 VMS
Velocity of Propagation	68% nom.
Impedance	100 +/- 15 Ohm 1-100 MHz
Propogation Delay	570ns/100m max @ 1 MHz 545ns/100m max @ 10 MHz 537ns/100m max @ 100 MHz
Delay Skew	35 ns/100 m max @ 1-100 MHz
Dielectric Strength	VAC/1min - 700V/min
Capacitance	pair 46 pF/m
Resistance Unbalance	2% max @ 20 deg. C
Capacitance Unbalance	3.2 pF/m max. @1KHz (wire to ground)
Insulation Resistance	5000 M Ohm / Km Min.
Return Loss (100MHz)	20 db/100 m min. @ 1 MHz 25 db/100 m min. @ 16 MHz 20.7 db/100 m min. @ 62.5 MHz 19 db/100 m min. @ 100 MHz
DC Resistance	96 Ohm/Km @ 20 deg. C
PoE Compatibility	Yes

Reeling Capability

In the core level, under the shields, are 4 conductor pairs and 6 strength members, 3 white and 3 yellow. Two central strength members perform a "tension relief" function. The other 4 are twisted around the pairs, each pair is wrapped in a strength member to perform a "pair structure holding" function. The reason for two types of strength members is that each one has a different prolongation constant – one positive, the other negative – so on average the length of the strength members remains constant and equal to the wire length.

To install on a reel, please use the following guidelines:

- Minimum reel core diameter is 10 cm.
- Minimum tension to be used during reeling and unreeling process.
- Terminate the cable with plugs before reeling is initiated.
- Cable length per reel is 90 metres or less.

Transmission Performance

	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz
Attenuation db/100m nom.	2.5	4.9	7.8	9.9	11.1	14.1	20.4	26.4
N.E.X.T (Near-End Crosstalk Loss) db min.	65	56	50	47	46	43	38	35

ProPlex CAT5e Ethernet cables meet attenuation specs up to 85m (275 ft); meets all other performance specs up to 100m (328 ft)

© 2026, TMB. All rights reserved. LITPCCAT5EUTPPA4 Effective: 2 September 2026
Specifications are subject to change without notice. This information supersedes all previously supplied information.

PUR Jacket Properties

Jacket Compound Specification

Halogen Free Flame Retardant Polyether-based Polyurethane, Glossy finish. Excellent Hydrolysis resistance. High microbial resistance. UV resistant. High flexibility.

Jacket Testing Results

Test	Test Method	Result
Density	DIN 53479	1.15g/cubic cm
Tensile strength	DIN 53504	40 nom. N/sqmm
Tensile strength after 42 days, H2O 80°C	DIN 53504	30 N/sqmm
Ultimate elongation	DIN 53504	550 nom. % min.
20% modulus	DIN 53504	3.2 N/sqmm
100% modulus	DIN 53504	5.5 N/sqmm
300% modulus	DIN 53504	12 N/sqmm
Tear strength	DIN 53515	60 N/mm
Hardness shore A	DIN 53505	87
Hardness shore D	DIN 53505	36
Melt index- MVR	ISO 1133	30-60 cubic cm/10 min
Brittle point	DIN 53513	-45°C
Abrasion Loss	DIN 53516	40 cubic mm
Compression set (23°C) 70h	DIN 53517	30%
Compression set (70°C) 24h	DIN 53517	50%

PUR Jacket Chemical Resistance Chart

Organic Substances

Medium	Temperature	Concentration	Reaction
Acetic Acid	Room Temp	20%	slight
Acetone	Room Temp	40%	poor
Astm Fuel A	Room Temp	4%	nil
Astm Fuel B	Room Temp	10%	nil
Astm Fuel C	Room Temp	18%	nil to slight
Astm Oil 1	80°C		nil
Astm Oil 2	80°C	3%	nil
Astm Oil 3	80°C	6%	nil
Benzene	Room Temp		poor
Butanol	Room Temp		poor
Butyl Acetate	Room Temp	40%	poor
Citric Acid	Room Temp		slight
Cutting Oil	Room Temp		nil to slight
Cyclohexanol	Room Temp	5%	slight
Dibutylphthalate	Room Temp	40%	slight
Diesel Oil	Room Temp		nil to slight
Diesel Oil	Room Temp	5%	nil
Diethylether	Room Temp		nil to slight
Diethylprestone	Room Temp		nil to slight
Dimethylformamide	Room Temp		soluble
Ethyl Alcohol	Room Temp	100%	slight
Ethylacetate	Room Temp	40%	poor
Ethylether	Room Temp		slight
Glycerin	Room Temp		nil
Glycol	Room Temp	2%	nil
Glysantin / Water 1:1	Room Temp		slight
Glysantin / Water 1:1	80°C		slight
Hydraulic Oil	Room Temp		slight
Isopropanol	Room Temp	12%	slight
Isopropyl Alcohol	Room Temp	100%	slight
Kerosene	Room Temp	3%	nil
Machine Oil	Room Temp		nil to slight
Methanol	Room Temp	10%	slight
Methyl Alcohol	Room Temp	100%	slight
Methylen Chloride	Room Temp		no resistance
Methylethylketone	Room Temp	45%	poor
Mineral Oil	80°C		nil
Olive Oil	Room Temp		nil
Paraffin Oil	Room Temp		nil to slight
Siccinic Acid, Aqu.	Room Temp	cold saturated	nil to slight
Vegetable Oil And Fats	Room Temp		nil

Inorganic Substances

Medium	Temperature	Concentration	Reaction
Acetic Acid	Room Temp	20%	nil to slight
Acetic Acid 3N	Room Temp		poor
Aluminium Chloride, Aqu.	Room Temp	5%	nil
Ammonia, Aqu.	Room Temp	10%	nil
Aniline	Room Temp		no resistance
Barium Salts	Room Temp	cold saturated	nil to slight
Boric Acid	Room Temp	100%	nil to slight
Calcium Chloride	Room Temp	cold saturated	nil to slight
Calcium Nitrate	Room Temp	cold saturated	nil to slight
Chromium Salts, Aqu.	Room Temp	cold saturated	nil to slight
Copper Salts, Aqu.	Room Temp	cold saturated	nil to slight
Fe Chloride, Aqu. 5%	40°C		slight
Hydrochloric Acid 20%	Room Temp	20%	nil to slight
Hydrogen Peroxide	Room Temp	3%	nil to slight
Hydrogen Sulphide	Room Temp		nil to slight
Magnesium Salts, Aqu.	Room Temp	cold saturated	nil to slight
Mercury	Room Temp	100%	nil to slight
Mercury Salts, Aqu.	Room Temp	cold saturated	nil to slight
Nickel Salts, Aqu.	Room Temp	cold saturated	nil to slight
Nitric Acid	Room Temp	20%	no resistance
Phosphoric Acid	Room Temp	50%	nil to slight
Potassium Carbonate, Aqu. (Potash)	Room Temp		nil to slight
Potassium Chloride	Room Temp	cold saturated	nil to slight
Potassium Dichromate, Aqu.	Room Temp		slight
Potassium Iodide	Room Temp		nil to slight
Potassium Nitrate,Aqu.	Room Temp		nil to slight
Potassium Permanganate	Room Temp		nil to slight
Potassium Sulphate, Aqu.	Room Temp		nil to slight
Sea Water	Room Temp	100%	nil
Silver Salts, Aqu.	Room Temp		nil to slight
Sodium Bicarbonate, Aqu. (Soda)	Room Temp		slight
Sodium Chloride, Aqu.	Room Temp		nil to slight
Sodium Chloride Solution, Conc.	Room Temp		nil
Sodium Hydroxide Solution 1N	Room Temp		slight
Sodium Thiosulphate, Aqu.	Room Temp		nil to slight
Sulphur	Room Temp	100%	nil to slight
Sulphur Dioxide	Room Temp		slight
Sulphuric Acid 20%	Room Temp		slight
Toluene	Room Temp	35%	poor
Water	100°C		poor
Water	Room Temp		nil
Water	80°C		nil to slight

Key:
Nil: Resistance over a prolonged period.
Nil to slight: After a certain time appreciable differences are noticeable.
Slight: Conditionally resistant.
Poor: Short term contact possible under certain conditions.
No resistance: Pronounced attack

© 2026, TMB. All rights reserved. LITPCCAT5EUTPPA4 Effective: 2 September 2026
Specifications are subject to change without notice. This information supersedes all previously supplied information.

High quality shielded and unshielded RJ45 connectors paired for optimum performance and reliability with ProPlex ethernet cables.

Use this table to determine which ProSeries RJ45 connector to use with each ProPlex cable.
Also the part number for compatible ProShell Backshell, ethernet connector, or snagless rubber boot.

Part Number	Ethernet Cable	Cable OD	ProSeries RJ45 Part Number	ProShell Part Number	Ethernet Connector Part Number	Rubber Boot Part Number
PCCAT5EUTPP	ProPlex	6.2 mm +/- 0.3 mm	RJ45K	PRJ0V2-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45KBTBK
PCCAT5EP26AWG	ProPlex	6.9 mm +/- 0.3 mm	RJ45SKV1	PRJ0V2-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45KBTBK
PCCAT5EPWE	ProPlex	7.1 mm +/- 0.3 mm	RJ45SKV1	PRJ0V2-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45KBTBK
PCCAT5EPU	ProPlex	8.1 mm +/- 0.3 mm	RJ45SKV4	PRJ0EX-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45V2BTBK
PCCAT5EPU2X	ProPlex	7.9 mm +/-0.3 mm	RJ45SKV4	PRJ0EX-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45V2BTBK
PCCAT5ETU4X	ProPlex	8.1 mm +/- 0.3 mm	RJ45SKV4	PRJ0EX-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45V2BTBK
PCCAT6AP	ProPlex	8.1 mm +/- 0.3 mm	RJ45SKV4	PRJ0EX-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45V2BTBK
PCCAT6AP2X	ProPlex	8.6 mm +/- 0.3 mm	RJ45SKV4	PRJ0EX-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45V2BTBK
PCCAT6APX	ProPlex	8.1 mm +/- 0.3 mm	RJ45SKV4	PRJ0EX-BK	Seetronic SE8MH02BLOD / Neutrik NE8MXB-1	RJ45V2BTBK
WDPCAT5ET	DataPlex	7.4 mm +/- 0.254 mm	RJ45SKV4	PRJ0EX-BK	Seetronic SE8MC130BLOD / Neutrik NE8MXB-1	RJ45V2BTBK
WDPCAT6AT	DataPlex	8.3 mm +/- 0.254 mm	RJ45SKV4	PRJ0EX-BK	Seetronic SE8MC130BLOD / Neutrik NE8MXB-1	RJ45V2BTBK
SCCAT6A	StarCable	7.0 ± 0.2 mm	RJ45SKV1	PRJ0V2-BK	Seetronic SE8MC130BLOD / Neutrik NE8MXB-1	RJ45KBTBK

Specifications			
	RJ45K	RJ45SKV1	RJ45SKV4
Housing Material	Clear Polycarbonate, UL94V-2	Clear Polycarbonate, UL94V-2	Clear Polycarbonate, UL94V-2
Contact Material	6U below brass. 15U above phosphor bronze.	Phosphor bronze with 50U hard gold plating	Phosphor bronze with 50U hard gold plating
Shield Material	No Shield	Nickel plated brass	Nickel plated brass
Wire Diameter	23-24 AWG	22-24 AWG	22-24 AWG
Cable Outside Diameter	6-7.5 mm	6-7.5 mm	6-8.6 mm
Operating Temperature	-10 to 60 °C	-40 to 80 °C	-20 to 75 °C
Voltage Rating	30 VAC, 1.5A	125 VAC, 1.5 A	250 VAC, 2.0 A
Dielectric Rating	500 VAC	500 VAC	1000 VAC
Insulation Resistance	500 megaohms	500 megaohms	500 megaohms
Termination Resistance	20 milliohms max.	35 milliohms max.	20 milliohms max
Standards	REACH, FCC Part 68, IEC 60603-7, UL Certified and RoHS compliant.	REACH, FCC Part 68, IEC 60603-7, UL Certified and RoHS compliant.	REACH, FCC Part 68, IEC 60603-7, UL Certified and RoHS compliant.

© 2026, TMB. All rights reserved. LITPCCAT5EUTPPA4 Effective: 2 September 2026
Specifications are subject to change without notice. This information supersedes all previously supplied information.

RJ45K

Dimensions in millimeters

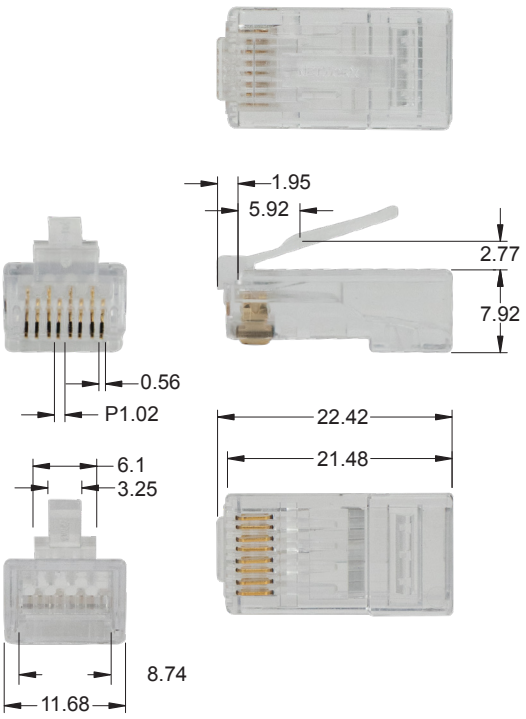

RJ45SKV1

Dimensions in millimeters

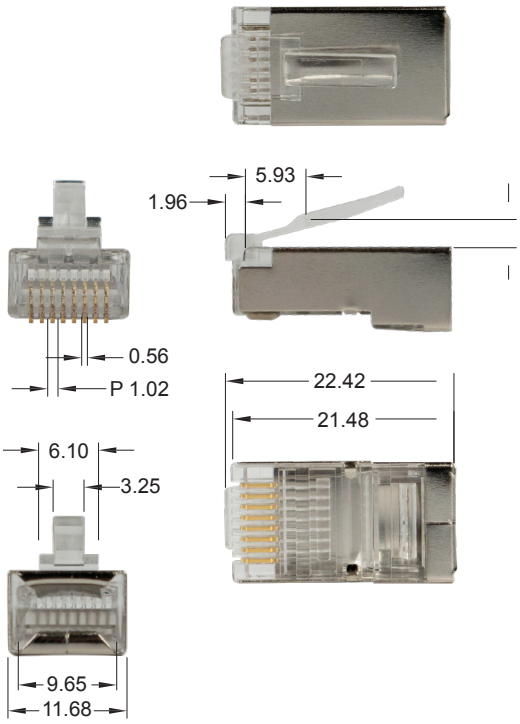

RJ45SKV4

Dimensions in millimeters

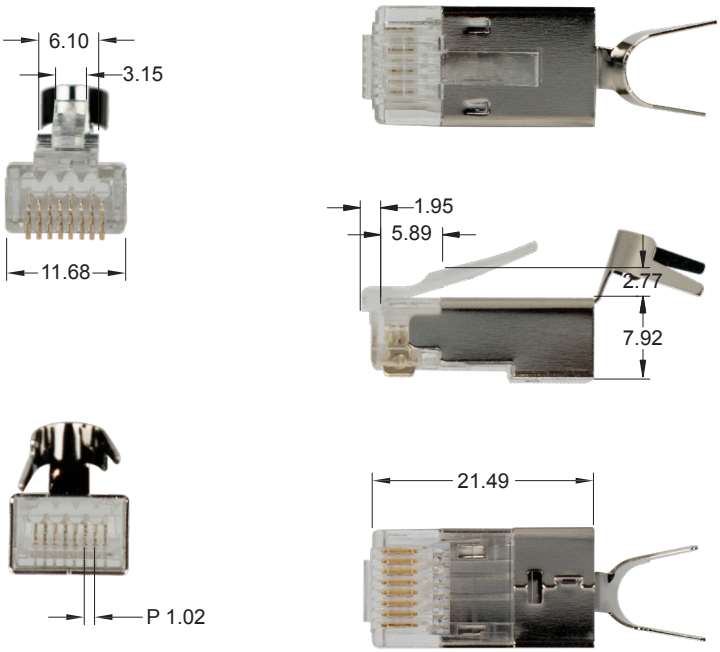

© 2026, TMB. All rights reserved. LITPCCAT5EUTPPA4 Effective: 2 September 2026
Specifications are subject to change without notice. This information supersedes all previously supplied information.

CONTACT INFORMATION

LOS ANGELES HEADQUARTERS

527 Park Avenue | San Fernando, CA 91340, USA

Tel: +1 818.899.8818 | Fax: +1 818.899.8813

sales@tmb.com

TMB 24/7 TECH SUPPORT

US/Canada: +1.818.794.1286

Toll Free: 1.877.862.3833 (1.877.TMB.DUDE)

UK: +44 (0)20.8574.9739

Toll Free: 0800.652.5418

techsupport@tmb.com

LOS ANGELES +1 818.899.8818

LONDON +44 (0)20.8574.9700

NEW YORK +1 201.896.8600

BEIJING +86 10.8492.1587

CANADA +1 519.538.0888

RIGA +371 6389 8886

www.tmbprocables.com

A full service company providing technical support, customer service, and follow-up. Providing products and services for the industrial, entertainment, architectural, installation, defense, broadcast, research, telecommunications, and signage industries. Servicing the global market from offices in Los Angeles, London, New York, Toronto, and Beijing.