ProPlex® GBS

NETWORK SELECTOR
4-WAY

4-way Ethernet Source Selector and Combiner
Especially useful as a lighting console switcher!

- **Active selection of any one or two of four network sources**
- **Seamless switching with no glitches. Retains links for truly instant switching.**
- **4 x 1Gb IN, 1 x 1Gb OUT, with indicating button selectors**
- **Input and Output indicator LEDs show network activity and speed**
- **Rugged ProPlex RackMount “blue-box” construction**

C US

CE

BUILT TO LAST!

ProPlex - DATA DISTRIBUTION YOU CAN DEPEND ON

RDM

Worldwide Exclusive Distribution

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb www.tmb.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +37 16.868.8955

© 2022, TMB. All rights reserved. LITPPGBSNS1X4RA4 Effective: 29 September 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com

Technical Specifications	
Part Number	PPGBSNS1X4R
Ethernet Ports	5
Ethernet Connectors	Neutrik EtherCon RJ45
Network Protocols	sACN, ArtNet, CobraNet, Dante, ETCNet, Ethersound, MA-Net, and more
Power	100-240V, 50-60 Hz
Power Connector	Neutrik PowerCon
Power Consumption	15 W
Fuse	1 A, 250 V
Operating Temp.	-20 to +40 ºC [-4 to +104 ºF]
Unit Dimensions (WxHxD)	482.6 x 43.7 x 212.8 mm [19 x 1.72 x 8.38 in]
Unit Weight (unpacked)	3 kg [6.6 lb]
Shipping Dimensions (WxHxD)	510 x 120 x 330 mm [20.1 x 4.75 x 13 in]
Shipping Weight	4 kg [8.8 lb]

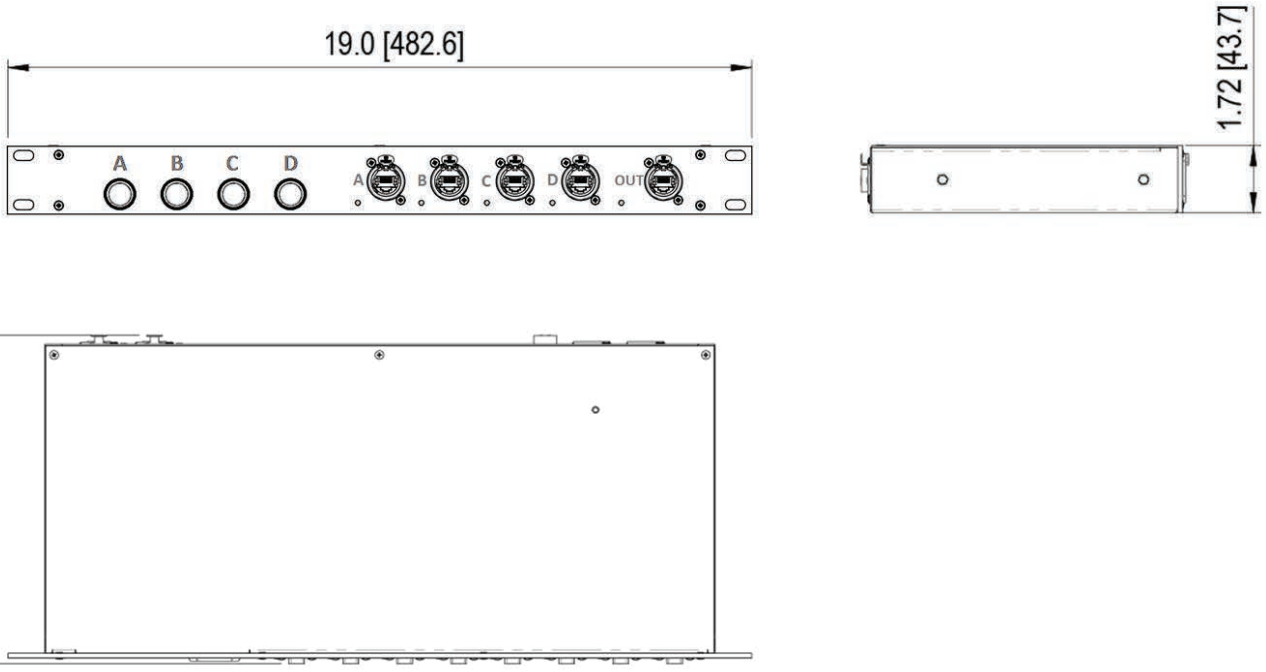

Dimensions in inches [mm]

© 2022, TMB. All rights reserved. LITPPGBSNS1X4RA4 Effective: 29 September 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.