



Durable, tour-ready combination CAT6/Low-Voltage cable! Full Gigabit Ethernet performance up to 85 meters, combined with up to 20 amps of low-voltage power!

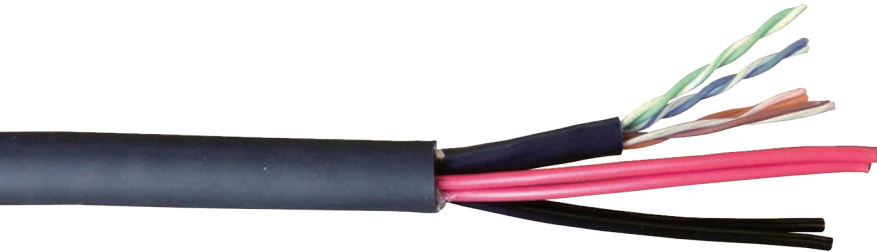

- Use anywhere Ethernet and LV power are required, indoors and outdoors!
- Compatible with the Neutrik 8+2 XLR connector
- Flexible, Durable, Outdoor rated!
- Suitable for permanent installation or long-term portable use
- Famous ProPlex handling, reliability, data integrity!

Specifications			
Part Number	PCLV8+2		
16 AWG Conductors	Conductor	Size and Stranding	65 strands 24 AWG
		Material	Bare annealed copper
		Material	Polyvinyl Chloride
	Insulation	Wall Thickness	0.010" [0.25 mm] nom.
		Diameter	0.079" [2 mm] nom.
		Color code	2 conductors black, 2 conductors red.
Rating	Max. Voltage	48 VDC	
Category 6 cable	Cable Type	Category 6 stranded patch cable	
	Diameter	0.220" [5.6 mm] nom.	
	Jacket color	Black	
Cable Assembly	Lay Length	5" [127 mm] nom. left hand	
	Fillers	None	
	Binder:	0.001" [0.025 mm] paper tape applied helically	
Jacket	Material	Matte finish polyvinyl chloride	
	Wall Thickness	0.030" [0.76 mm] nom.	
	Diameter	0.385" [9.78 mm] nom.	
	Color	Black	
Markings	Type	Surface print with white ink	
	Legend	ProPlex PCLV8+2 PowerData LV 8+2 Hybrid Cable	

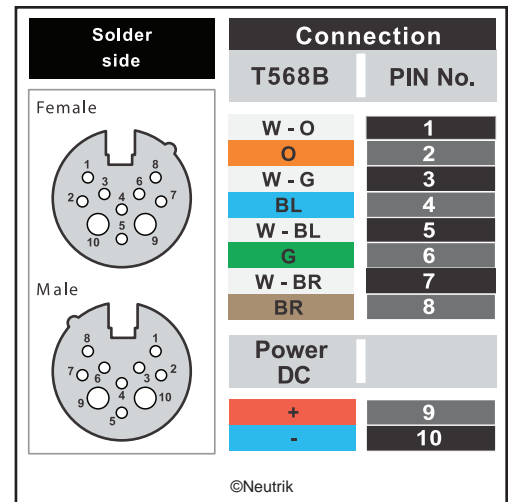

RoHS
Compliant

Worldwide Exclusive Distribution

sales@tmb.com

Los Angeles
+1 818.899.8818

London
+44 (0)20.8574.9700

tmb
www.tmb.com

New York
+1 201.896.8600

Beijing
+86 10.8492.1587

Toronto
+1 519.538.0888