


15,000 WATT VERY BRIGHT OUTDOOR STROBES**FEATURES**

- Stainless steel housing is rated to IP65
- 450,000 lumens maximum output!
- DMX512 control
- Continuous lighting capability (120Hz)
- Automatically controlled electronic safety feature
- Auto voltage sensing
- Thermal shut-down feature
- Highly accurate flashing system
- Three phase system capability
- Compact size
- SELF-Test functions, LED indicators
- Optional controllers can execute pre-programmed or customized lightning sequences at the push of a button or triggered via DMX512

Worldwide Exclusive Distribution**sales@tmb.com**Los Angeles
+1 818.899.8818London
+44 (0)20.8574.9700**tmb**
www.tmb.comNew York
+1 201.896.8600Beijing
+86 10.8492.1587Toronto
+1 519.538.0888

Specifications			
Lamp	Maximum continuous flash discharge	2.5 seconds	
	Frequency of continuous mode	120 Hz	
	Flash tube type	Proprietary Long Arc Xenon tube	
	Color temperature	5600° Kelvin	
Control Parameters	Intensity control		
	Adjustable flash frequency		
Electronic & Safety Devices	Overheating protection	80°C, 110 °C, self resetting	
	Self-test	Preprogrammed	
	Indicator LEDs	Red: Power Yellow: Mode/Protection Green: Data	
Control System	Digital display and pushbutton programming of parameters		
	Number of channels	2	
	Connection type	Terminal block	
	Supported Protocols	DMX512	
Power Supply	Nominal mains voltage	190-260 VAC, 50-60 Hz	
	Power requirement	20A breaker	
	Max. power draw	Continuous	60A
		Turbo	32A
Fixture & Housing	Protection from breaking flash tube	Soft spring suspension system	
	Fixing	Adjustable yoke	
	Corrosion protection	Stainless steel body, IP65 rating	
	Unit Dimensions (HxWxD)	9.25" x 19.5" x 12.215" / 23.5 x 49.5 x 31 cm	
	Shipping Dimensions (HxWxD)	TBA	
	Unit weight	TBA	
	Shipping weight	TBA	

Dimensions

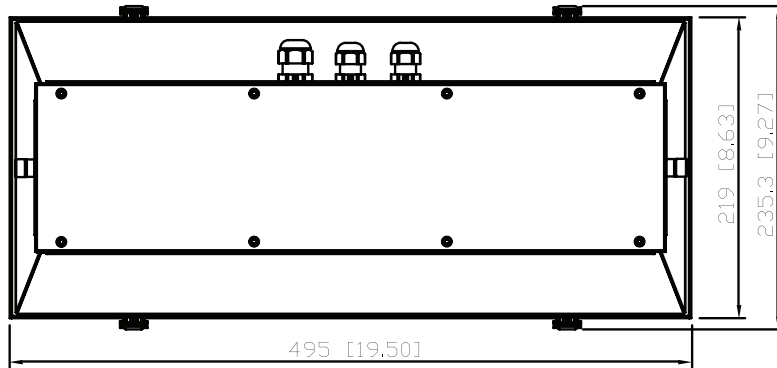

Dimensions
in Millimeters
[Inches]

