


# 19-PIN 6-CIRCUIT CONNECTOR PINOUT

Industry-Standard for United Kingdom and other 220/240V countries.

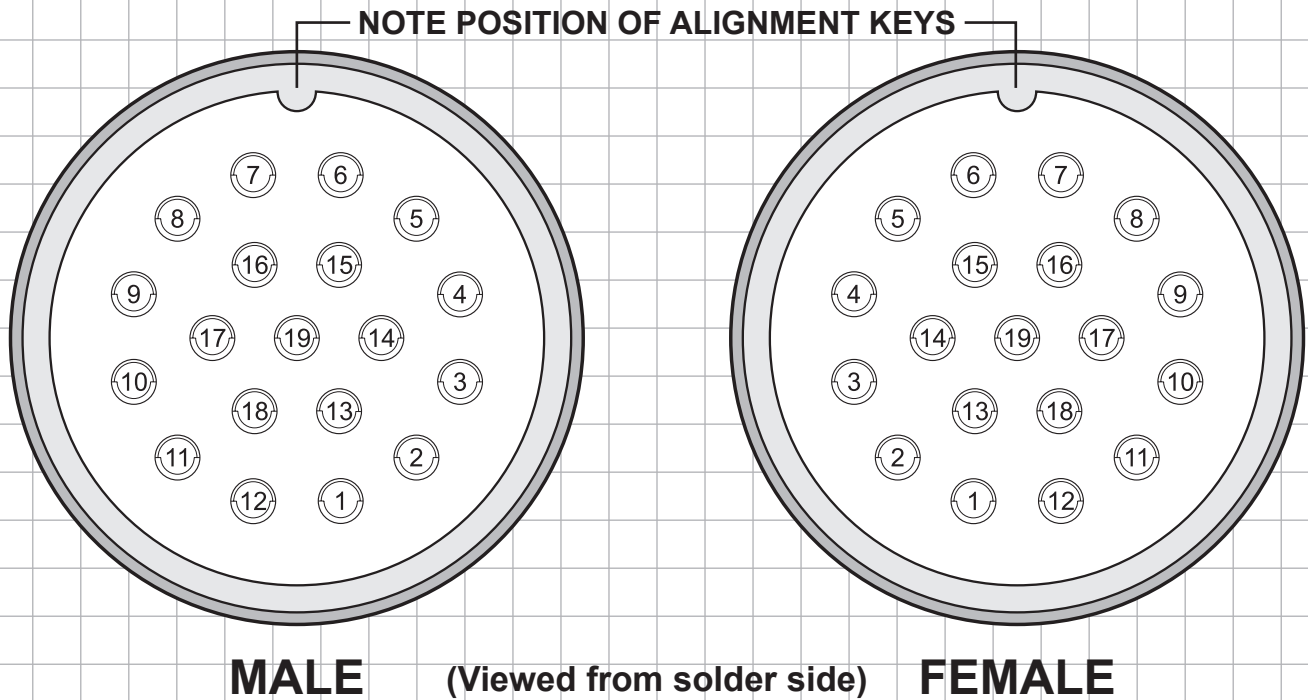

WHEN WIRED FOR 220/240 VOLTS			
CIRCUIT	HOT	NEUTRAL	EARTH
1	Pin 1	Pin 2	Pin 13
2	Pin 3	Pin 4	Pin 14
3	Pin 5	Pin 6	Pin 15
4	Pin 7	Pin 8	Pin 16
5	Pin 9	Pin 10	Pin 17
6	Pin 11	Pin 12	Pin 18

- Cables are wired using 18- or 19-core cable so each circuit has a discrete earth connection. While earth pins are often bussed in North America and other 120/208V countries, that practice is not recommended for 220/240V countries.
- Pin 19 may be unwired or wired as an additional earth or used for proprietary purposes.
- While this is the de facto industry standard pinout for wiring 6-circuit 19-pin power cables, there is no guarantee that all equipment is wired this way. Always make sure that equipment is wired alike before energising. TMB assumes no responsibility for damage to equipment due to mis-wiring of connectors and equipment.



Production Supplies & Services Worldwide

tmb-info@tmb.com

LOS ANGELES

LONDON

NEW YORK

BEIJING

TORONTO

Tel: +1 818.899.8818

Tel: +44 (0)20.8574.9700

Tel: +1 201.896.8600

Tel: +86 10.8492.1587

Tel: +1 519.986.9991

LIT6CIRPINOUTA4-062812

© TMB