


2" Swivel Coupler



**Black Anodized
Versions
Also Available**

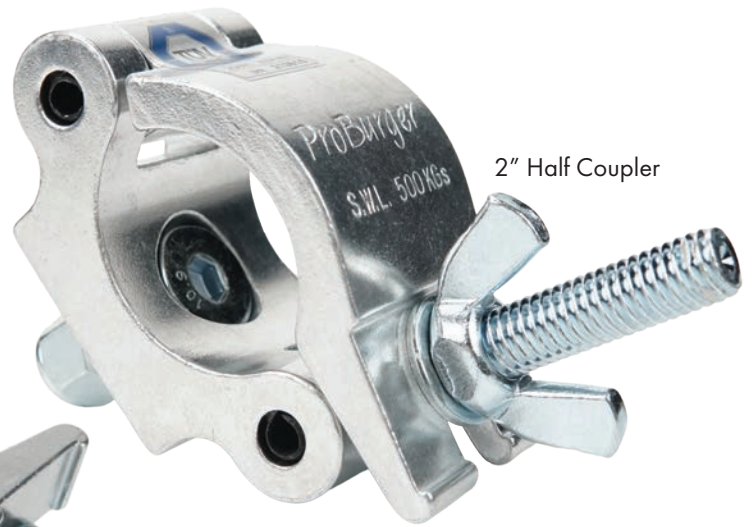

2" Half Coupler



2" Slim Swivel
Coupler



2" Slim Half Coupler



2" Lightweight Adjustable
Coupler

Can be instantly fixed at any 45 degree
interval without a roll pin.



1" Half Coupler



2" Snap Coupler



2" Half Coupler
with 1 1/8" Spigot



2" Lightweight
Coupler



2" Half Coupler
with Eye Ring

ProBurger couplers are constructed from a certified high tensile-strength 6061 T6 aluminum extrusion. They attach securely to tubes and combine strength and durability with a high degree of safety. ProBurger range is tested to a safety factor of 10:1. Select models TUV certified.

ProBurger provides entertainment industry users with a great deal of flexibility in creating attachments to meet their individual requirements.

Worldwide Exclusive Distribution

sales@tmb.com

Los Angeles
+1 818.899.8818


London
+44 (0)20.8574.9700

tmb
www.tmb.com




New York
+1 201.896.8600

Beijing
+86 10.8492.1587

Toronto
+1 519.538.0888

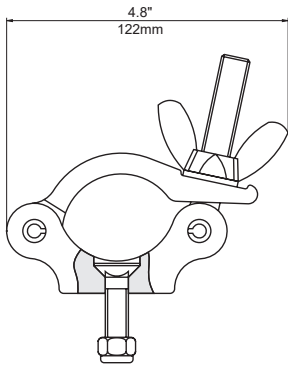

For use with
2" OD tubing

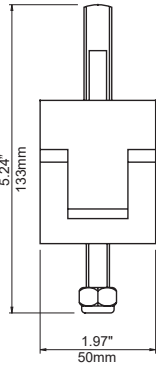


Exclusive MagicBolt
No hex key needed!
ASTM International
Grade 10.9




2" Half Couplers

| | | | |
|-----------|---|------------------|---|
| PRBHC3/8 | 3/8"-16 MagicBolt Natural Finish | 500 Kg S.W.L. | Unit Weight: 1.15 lb [0.52 kg] |
| PRBHC3/8B | 3/8"-16 MagicBolt Black Anodized Finish | | |
| PRBHC1/2 | 1/2"-13 MagicBolt Natural Finish | | |
| PRBHC1/2B | 1/2"-13 MagicBolt Black Anodized Finish | | |

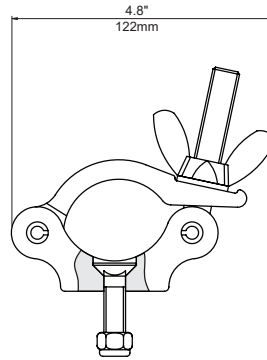

For use with
2" OD tubing

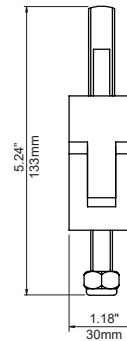


Exclusive MagicBolt
No hex key needed!
ASTM International
Grade 10.9




2" Slim Half Couplers


| | | | |
|----------|--|------------------|-----------------------------------|
| PRBHCSL | 3/8"-16 MagicBolt Natural Finish | 300 Kg S.W.L. | Unit Weight: 0.75 lb [0.34 kg] |
| PRBHCSLB | 3/8"-16 MagicBolt Black Anodized Finish | | |

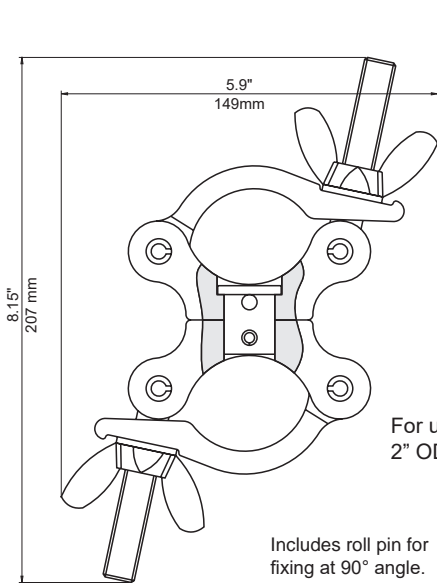

For use with
2" OD tubing

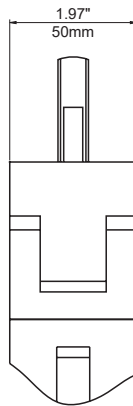


Includes roll pin for
fixing at 90° angle.




2" Swivel Couplers

| | | | |
|--------|--|------------------|-----------------------------------|
| PRBSC | Swivel Coupler, Natural Finish | 500 Kg S.W.L. | Unit Weight: 2.15 lb [0.98 kg] |
| PRBSCB | Swivel Coupler, Black Anodized Finish | | |

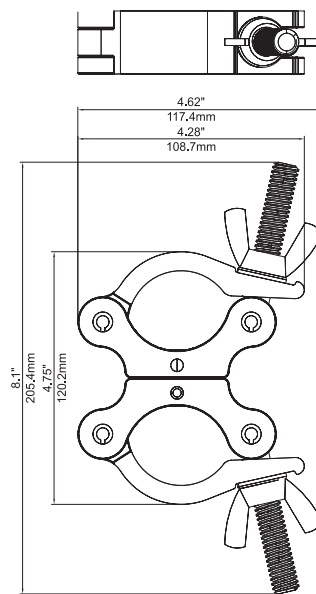


For use with
2" OD tubing




2" Slim Swivel Couplers


| | | | |
|----------|---|------------------|----------------------------------|
| PRBSLSC | Slim Swivel Coupler, Natural Finish | 300 Kg S.W.L. | Unit Weight: 1.5 lb [0.68 kg] |
| PRBSLSCB | Slim Swivel Coupler, Black Anodized Finish | | |

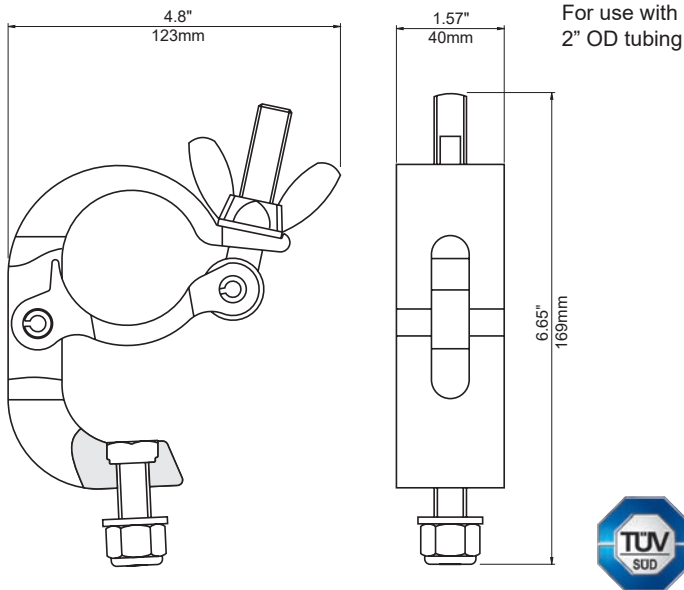


| 2" Snap Couplers | | | |
|------------------|---|---------------|-------------------------------|
| PRBSNC1/2 | 1/2"-13 Mounting Bolt Natural Finish | 300 Kg S.W.L. | Unit Weight: 1.3 lb [0.59 kg] |
| PRBSNC1/2B | 1/2"-13 Mounting Bolt Black Anodized Finish | | |

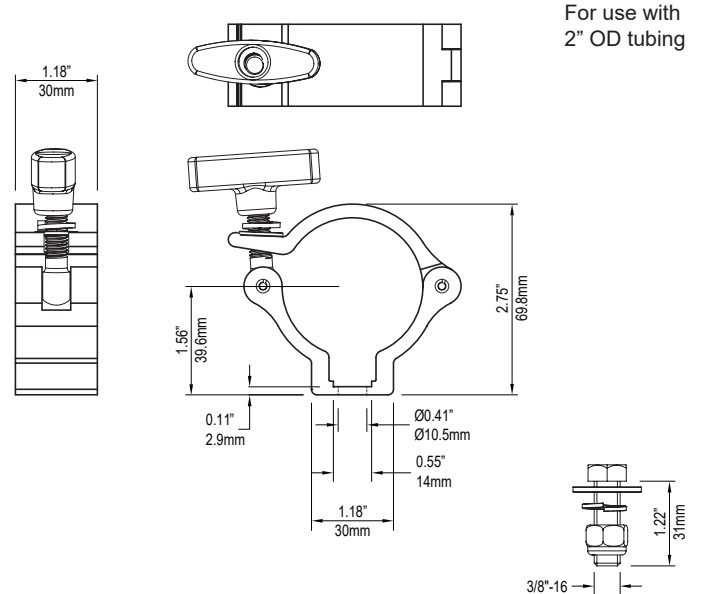


| 2" Lightweight Couplers | | | |
|-------------------------|--|--------------|-------------------------------|
| PRBHCLW | Lightweight Coupler, Natural Finish | 75 Kg S.W.L. | Unit Weight: 0.4 lb [0.18 kg] |
| PRBHCLWB | Lightweight Coupler, Black Anodized Finish | | |

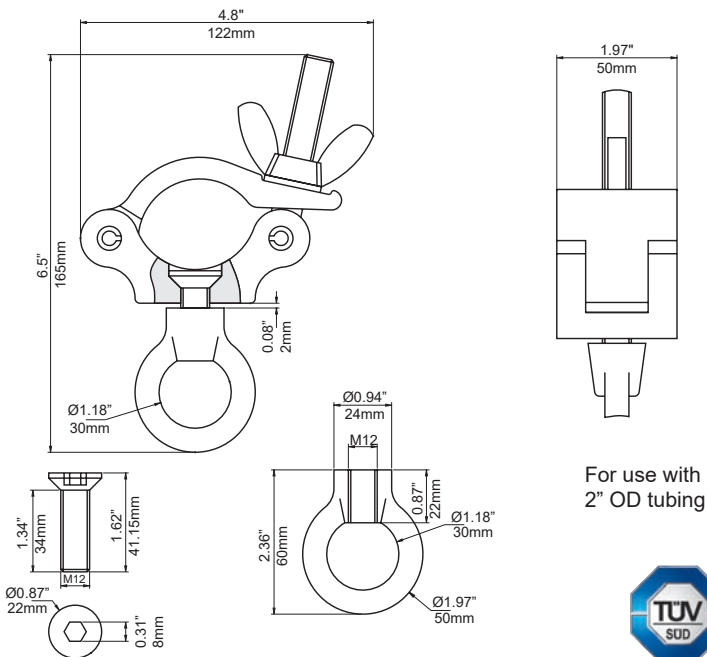


| 2" Half Coupler with Eye Ring | | | |
|-------------------------------|-----------------------------|---------------|--------------------------------|
| PRBERC | M12 Eye Ring Natural Finish | 340 Kg S.W.L. | Unit Weight: 1.35 lb [0.61 kg] |

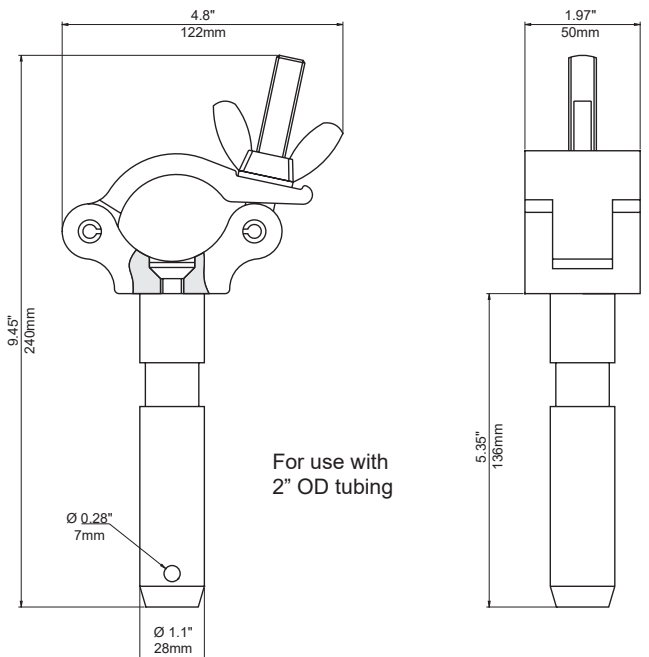

| 2" Half Coupler with Spigot | | | |
|-----------------------------|------------------------------|---------------|--------------------------------|
| PRBSPC | 1 1/8" Spigot Natural Finish | 500 Kg S.W.L. | Unit Weight: 2.25 lb [1.02 kg] |





For use with
2" OD tubing

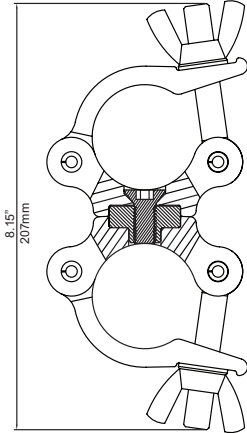

2" Lightweight Adjustable Couplers

| | | | |
|--------|---|------------------|-----------------------------------|
| PRBACS | Adjustable Coupler Natural Finish | 194 Kg S.W.L. | Unit Weight: 2.25 lb [1.02 kg] |
| PRBACB | Adjustable Coupler Black Anodized Finish | | |

For use with
1" OD tubing

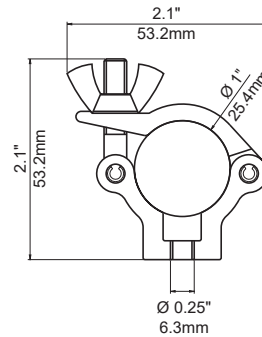

1" Half Couplers

| | | | |
|--------|---|-----------------|--------------------------------|
| PRBHC1 | 1/4" Mounting Bolt (bolt not included) Natural Finish | 50 Kg S.W.L. | Unit Weight: 0.10 lb [0.05 kg] |
|--------|---|-----------------|--------------------------------|

ALWAYS USE A SAFETY CABLE!



Safety Cables

| | |
|------------|--------------------------------------|
| SAF1/8X30S | Safety cable, 1/8x30" w/snap, silver |
| SAF1/8X30B | Safety cable, 1/8x30" w/snap, black |